


- INSTRUCTION MANUAL -

# PIER SYSTEM

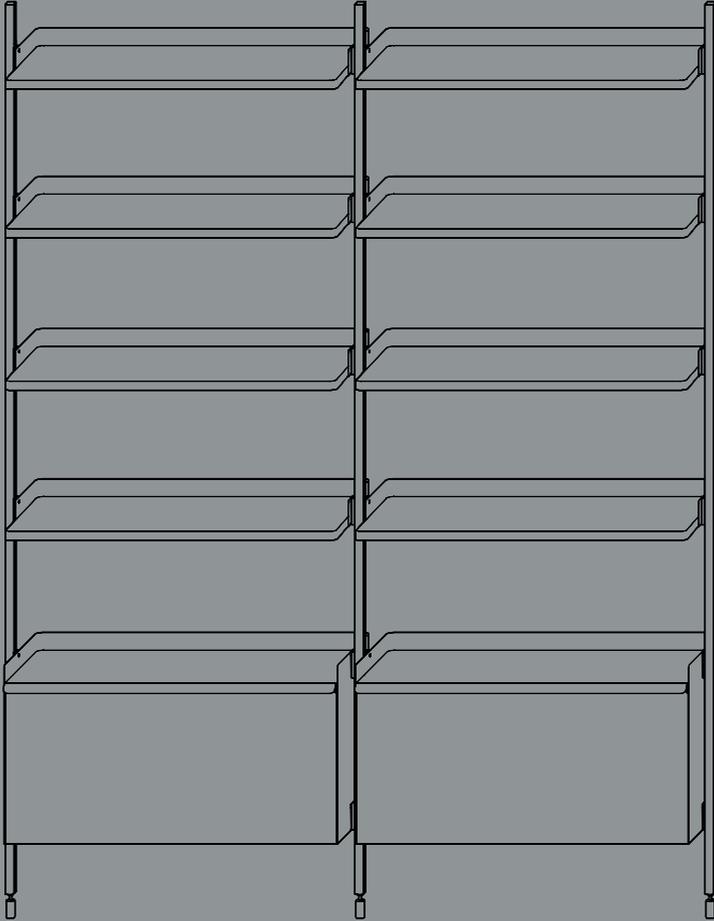


DESIGN BY RONAN & ERWAN BOURULLEC

# HAY







- PARTS -

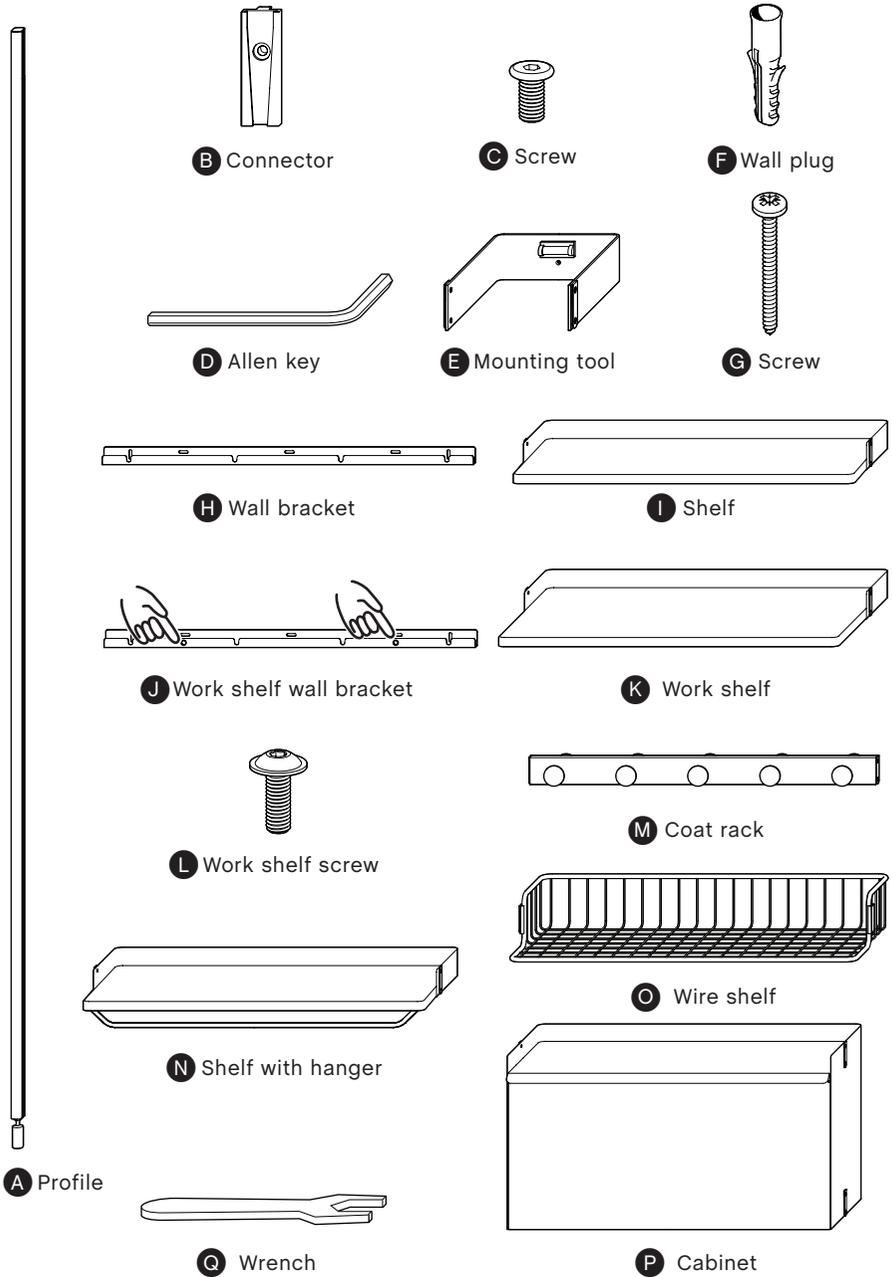

After assembly it's important to keep all tools for future adjustments or disassembly.

Protect the products from scratches and other damage while assembling.

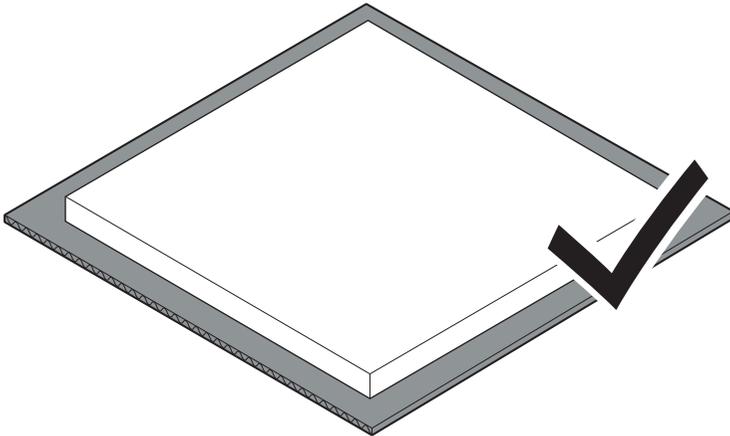
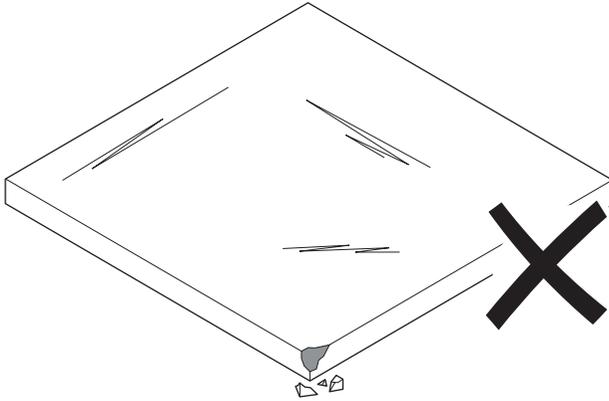


- INSTALLATION OF CONNECTORS -



When assembling your Pier System, you first need to identify where on the profiles the shelves are going to be mounted. This page features three standard configurations, with markings for where the connectors that hold the shelves are to be mounted.

To mount a connector **B**, align its hole with the corresponding hole in the profile **A**.



Insert the screw **C** and tighten it with the Allen key **D**.

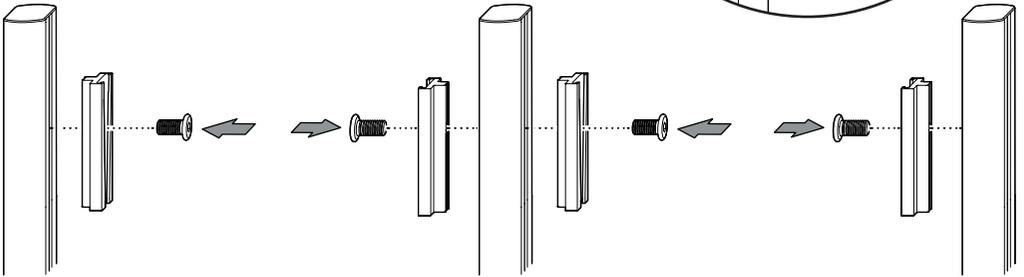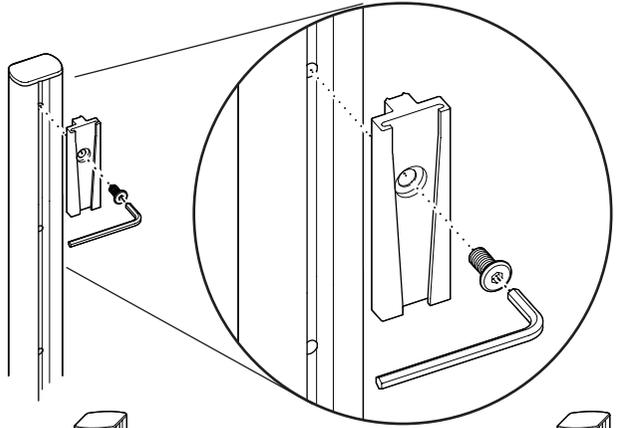



CONFIGURATION 1

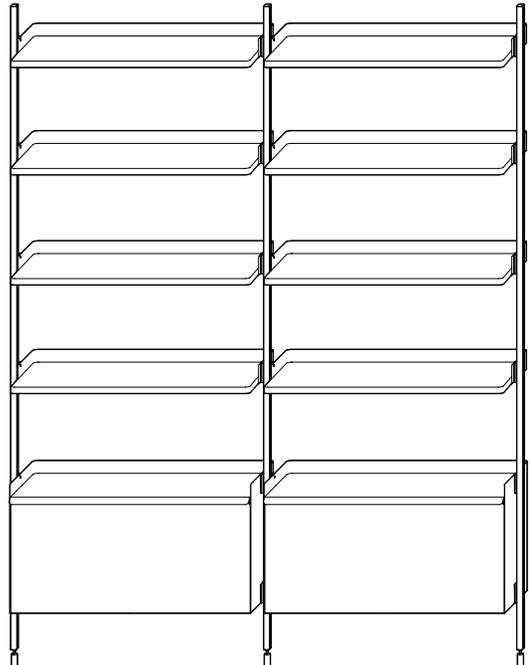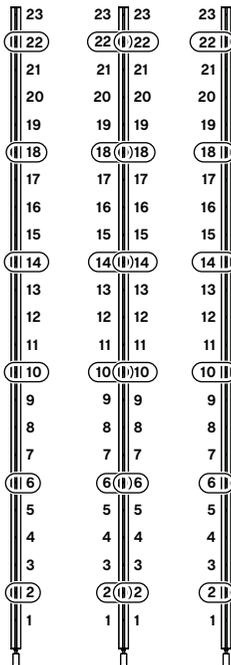


CONFIGURATION 2

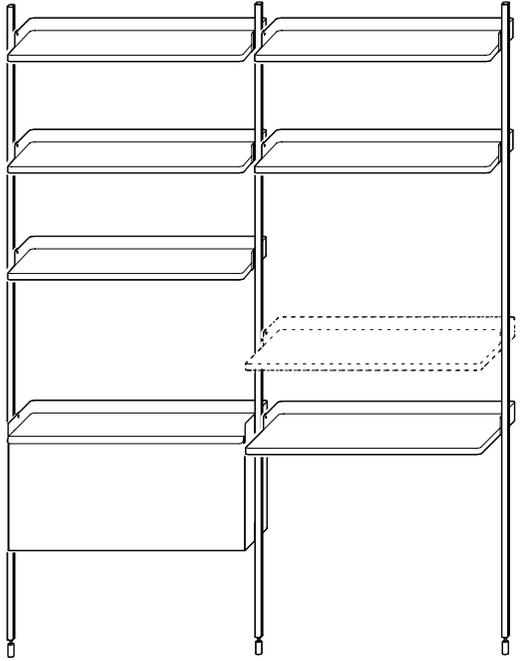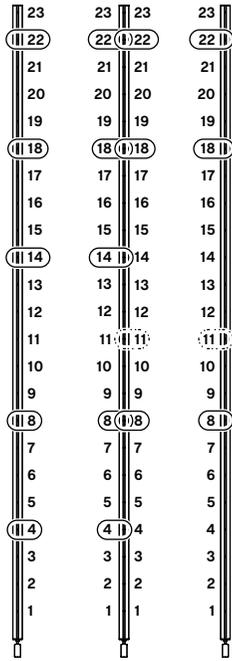

CONFIGURATION 3

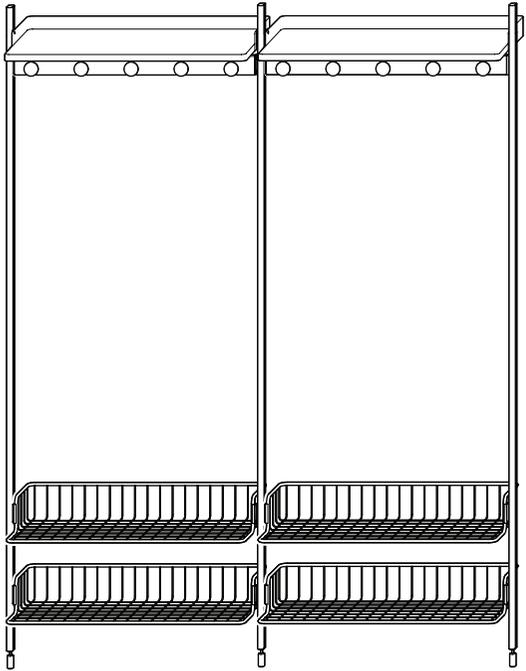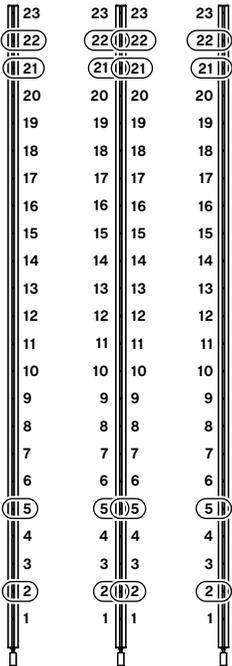


- NOTICE -

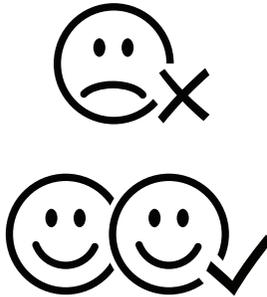


When assembling the Pier system,  
you need to be a minimum of  
two people.


- SECURING TO THE WALL -



Pier System is secured to the wall with a wall bracket. The wall bracket must be connected to a shelf that is mounted above the 14th hole in the profile, counting from the bottom. This is to ensure the overall stability of the unit.

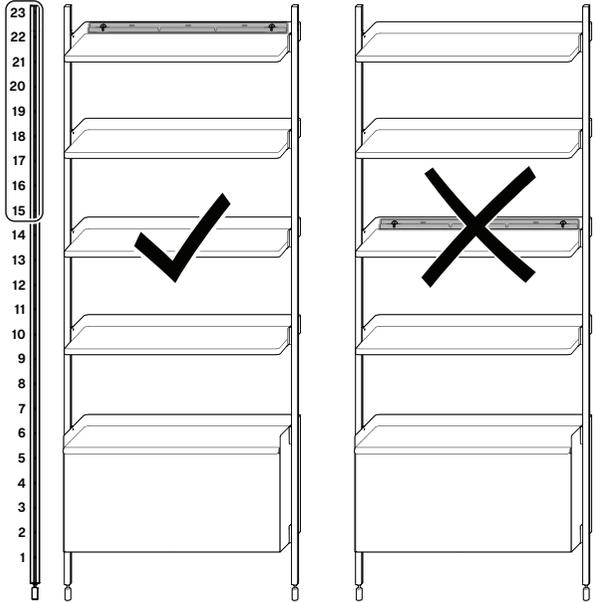

If your Pier System configuration includes a Work desk shelf, it must be connected to a Work desk wall bracket fastened to the wall. A regular shelf, connected to a wall bracket fastened to the wall, must also be connected to the same upright profiles as the Work desk shelf.

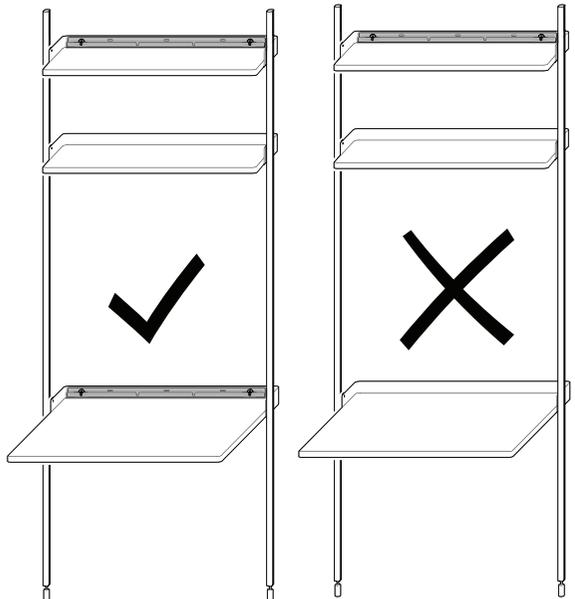


- INSTALLATION OF WALL BRACKET -

Make sure you have mounted all connectors on your profiles before going ahead.

1. Insert the Mounting tool **E** into the Connector **B** on a Profile **A**.
2. Make sure it is level, and then make a mark on the wall, through the small hole in the Mounting tool **E**.
3. Drill a hole in the wall on your marking. If you are using the provided wall plugs, use a 10 mm (5/16") drill bit.


4. Identify your wall type. If it is a brick wall or solid concrete, insert the provided wall plugs **F**. Other wall types may require other types of fastening. Consult a professional if in doubt.
5. Line up the Wall bracket **H** and fasten it with a Screw **G**. Do not tighten the screw completely.
6. Make sure the Wall bracket is level, then mark where to drill the next hole.
7. Move the wall bracket to the side and drill a hole on your marking.

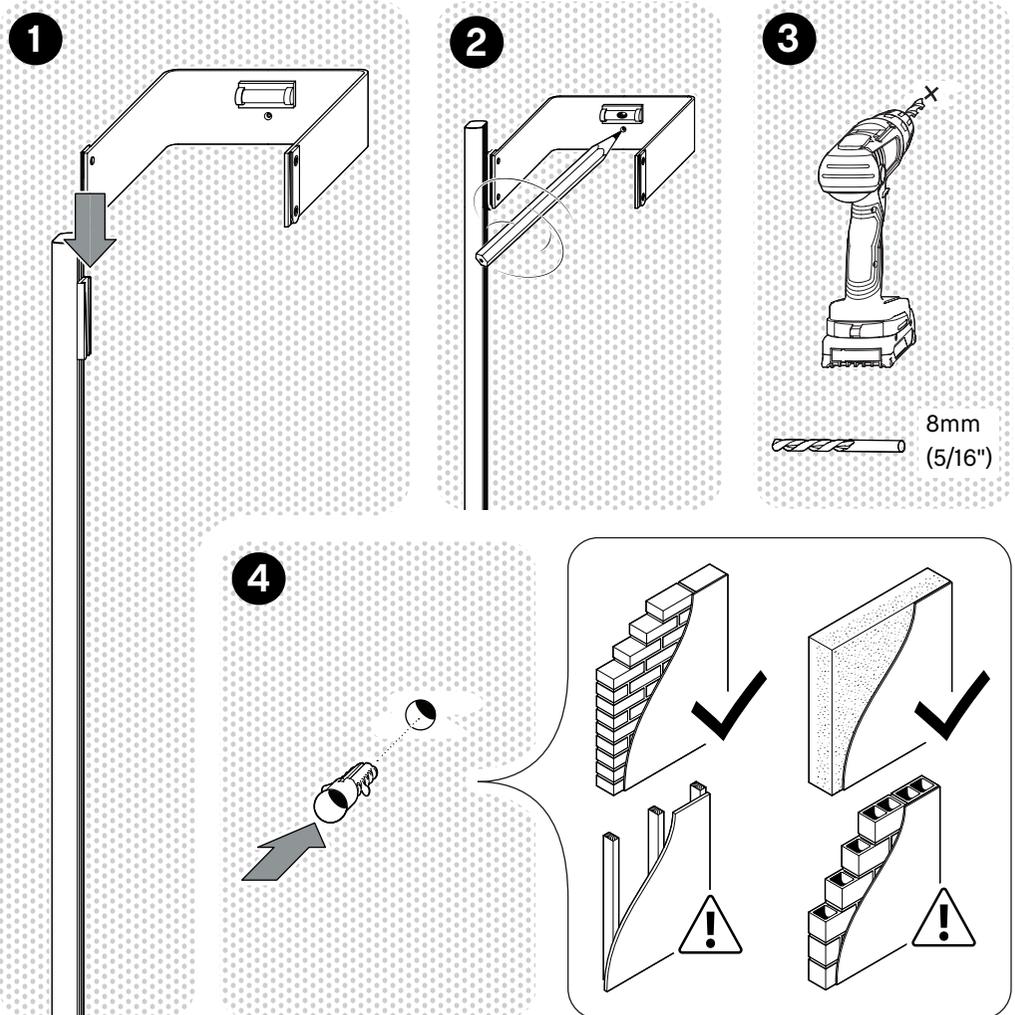







8. Insert the wall plug.


9. Move the wall bracket back up and insert the next screw. Do not tighten it completely yet.

10. Use a spirit level (or the mounting tool **E**) to make sure the wall bracket is level. Then tighten both screws completely.



The provided wall plugs and screws are designed for brick wall or solid concrete only. Please identify your wall type before mounting and use alternative fastening hardware if needed. If in doubt, consult a professional.

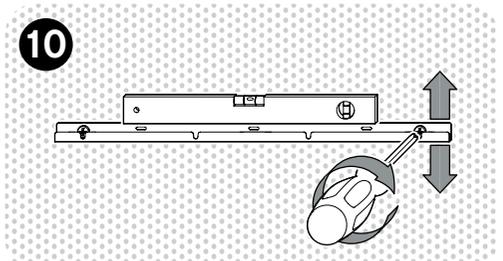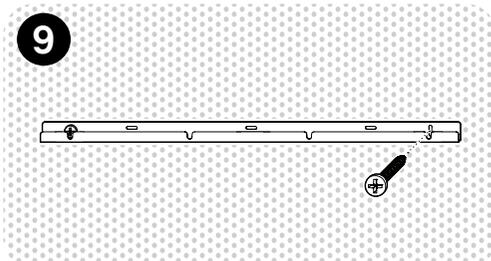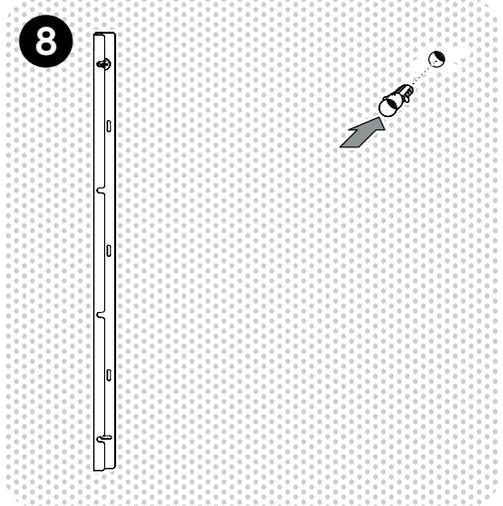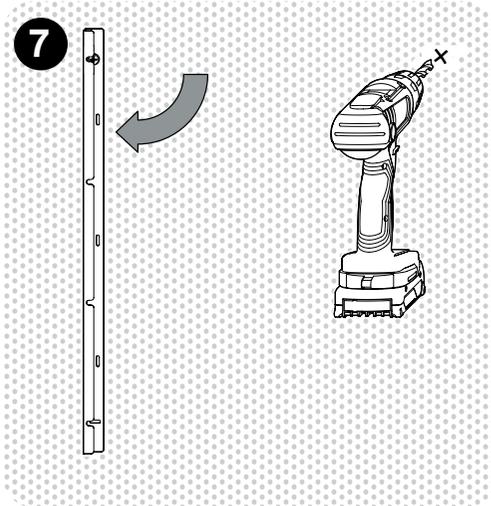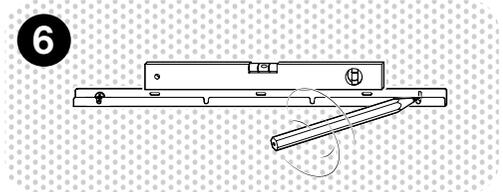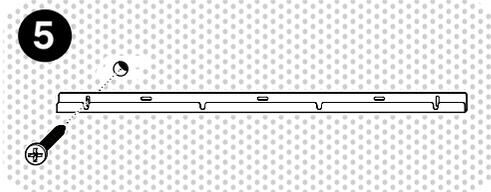




## CONFIGURATION 1



Make sure you have finished the first steps with mounting connectors and the first wall bracket before going ahead with the next step.

1. Start by laying a Cabinet **P** and a Shelf **I** down on their backs. Then fasten them to the pre-assembled connectors on the Profiles **A** by sliding them into the cut-outs.
2. Lift the shelf onto the pre-mounted Wall bracket **H**.

1

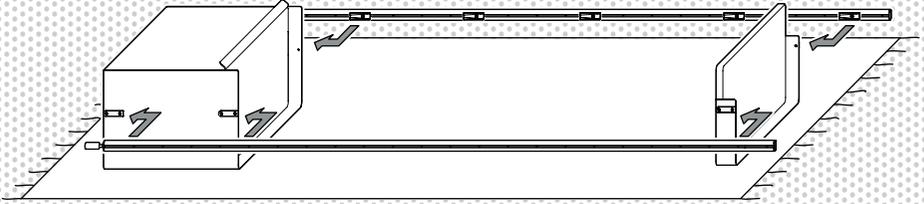


2

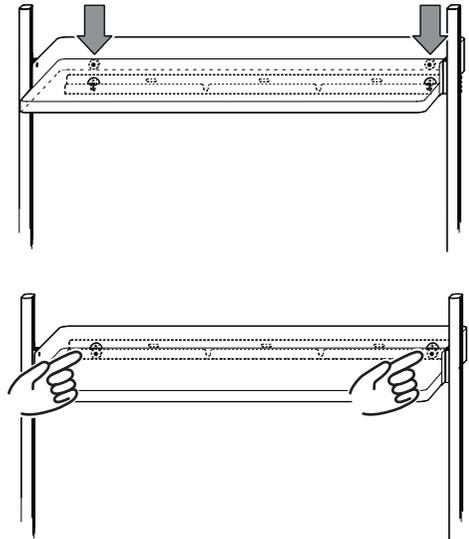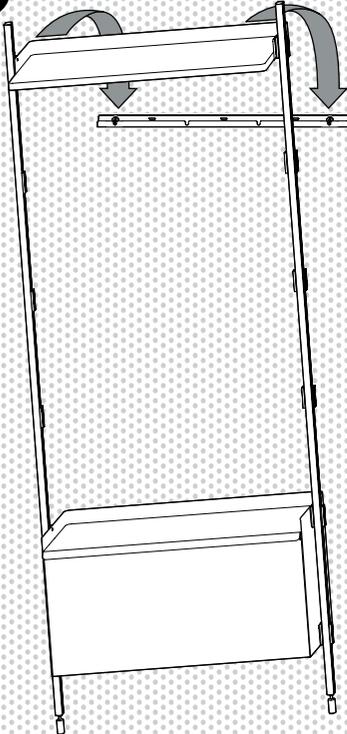




Make sure the connectors on the back of the shelf go into the designated cut-outs on the wall bracket.

3. Slide the rest of the shelves into the connectors on the profiles.

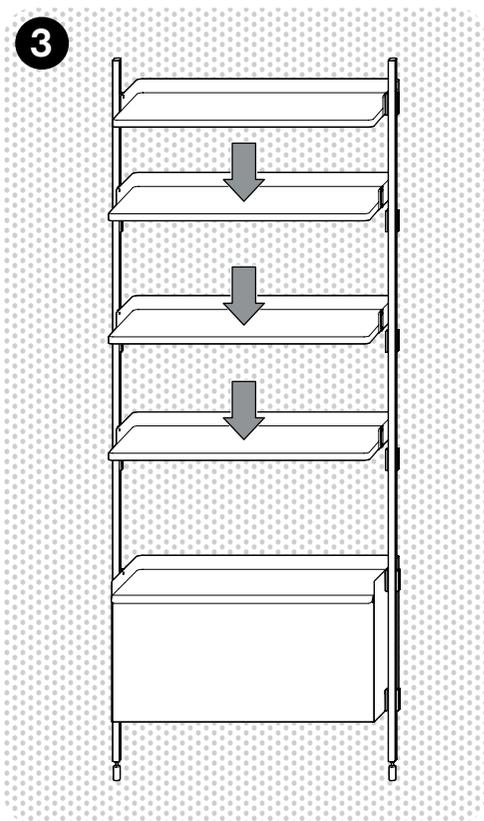


4. Slide the Mounting tool **E** into the top connector on the profile.


5. Go back to pages 10-11 and follow the instructions to mount the next wall bracket.

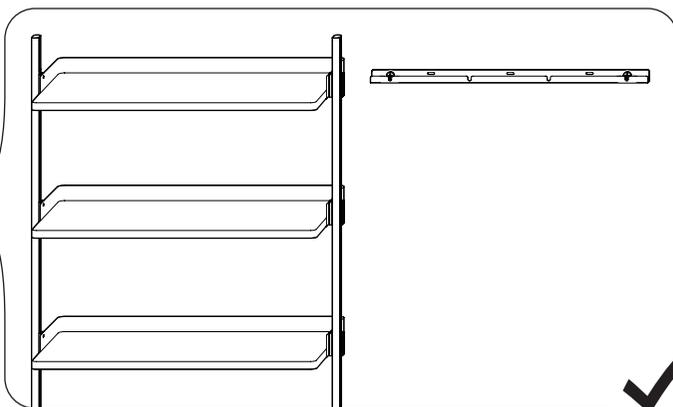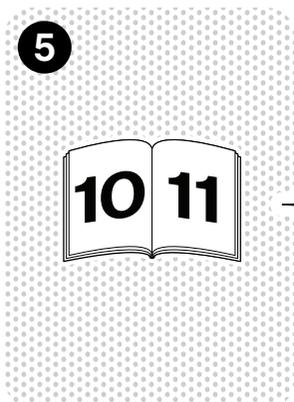
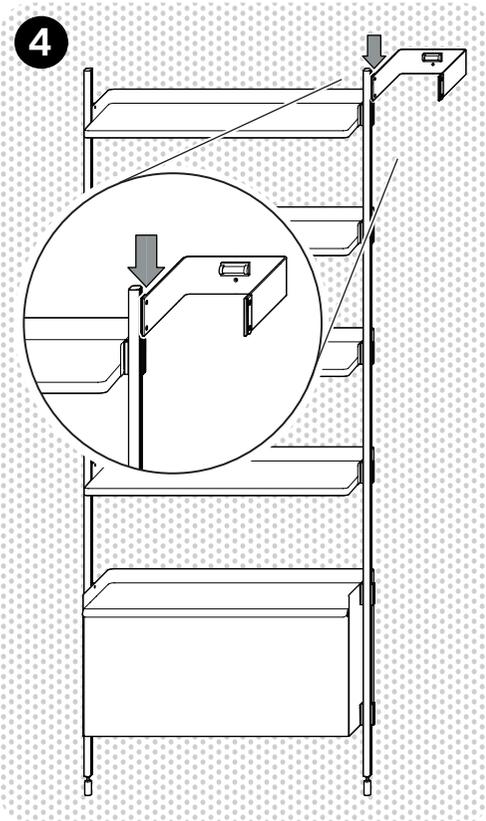


6

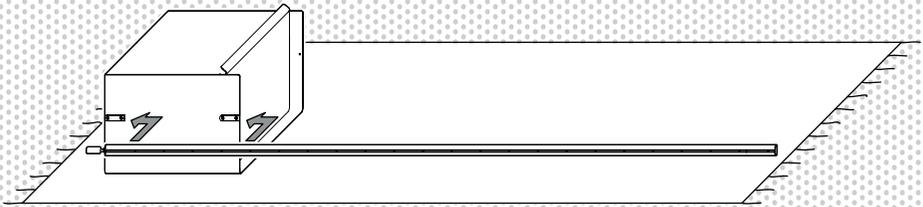

7

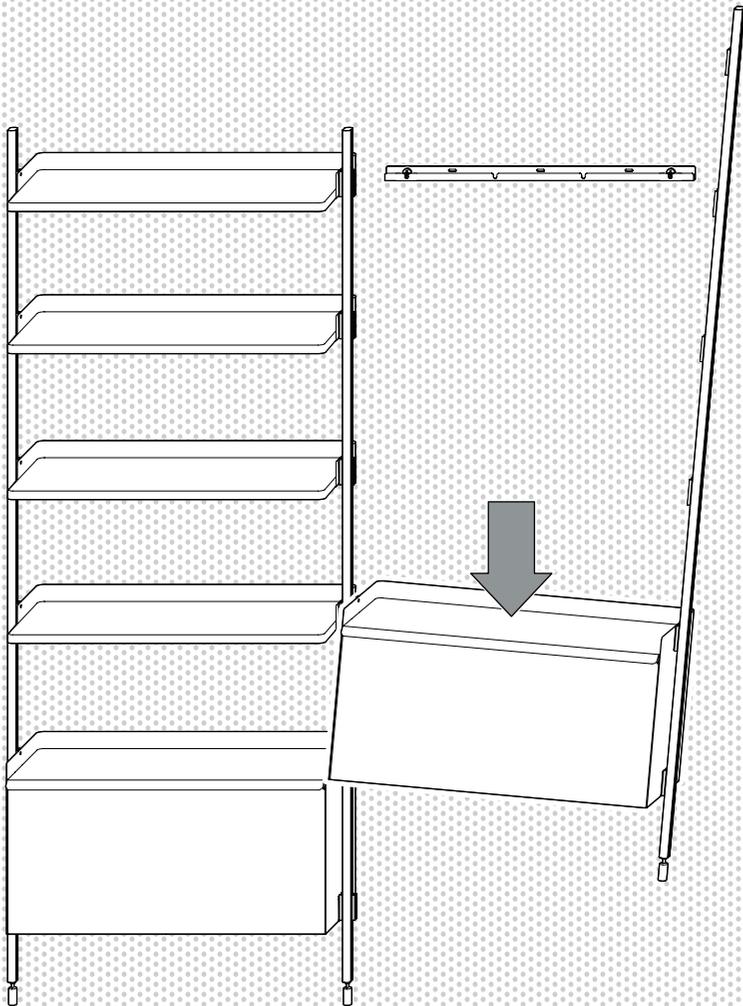

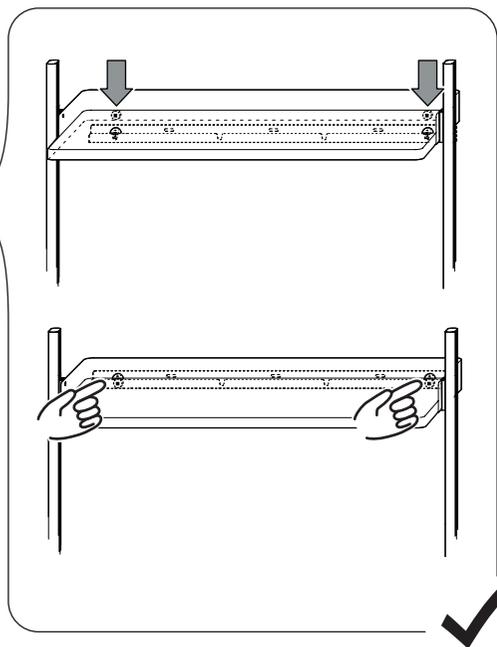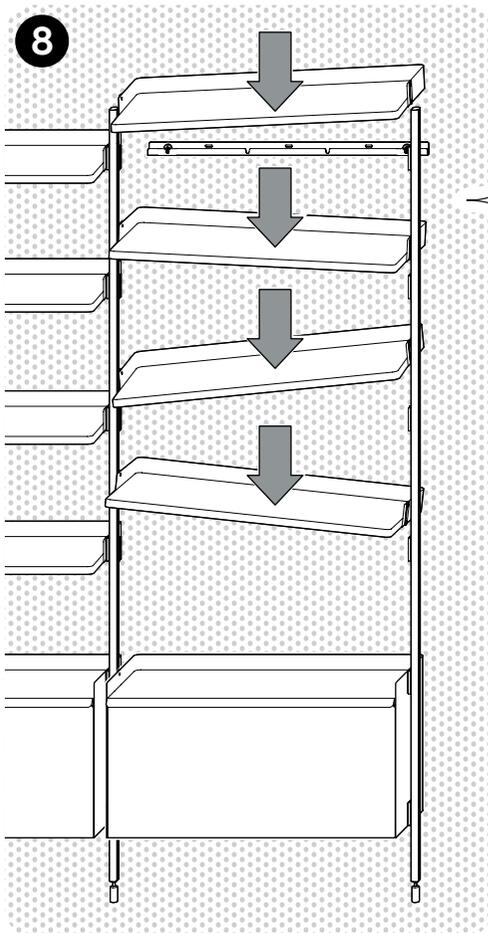



7. Lay the other Cabinet **P** on the floor and connect the last Profile **A** by sliding the cabinet into the cut-outs of the connectors.

8. Lift the cabinet and profile and slide into the connectors of the middle profile.

9. Slide the rest of the shelves into the connectors. Make sure the connectors on the back of the top shelf go into the designated cut-outs in the wall bracket.

10. Finally, you can adjust the height of the feet of your shelving by first loosening the nut right under the profile. Use the provided Wrench **Q**. Then turn the glider to bring it up or down. Tighten the nut when you have reached the desired height.

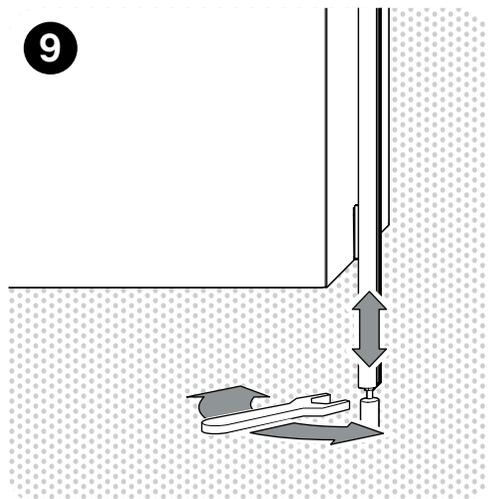




## CONFIGURATION 2

Make sure you have finished the first steps with mounting connectors and the first wall bracket before going ahead with the next step.



1. Start by laying a Cabinet **P** and a Shelf **I** down on their backs. Then fasten them to the pre-assembled connectors on the Profiles **A** by sliding them into the cut-outs.

2. Lift the shelf onto the pre-mounted Wall bracket **H**.

1

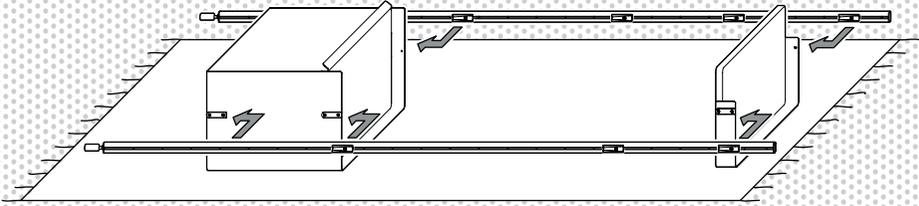

2



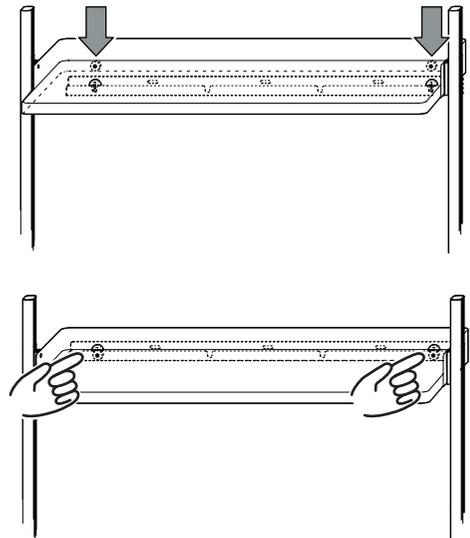
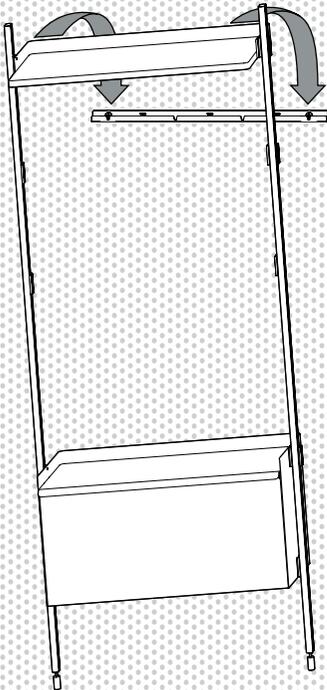


Make sure the connectors on the back of the shelf go into the designated cut-outs on the wall bracket.

3. Slide the rest of the shelves into the connectors on the profiles.





4. Slide the Mounting tool **E** into the connector where the Work shelf **K** will sit.

5. Go back to pages 10-11 and follow the instructions to mount the next wall bracket. Make sure to mount the Work desk wall bracket with the two extra holes.

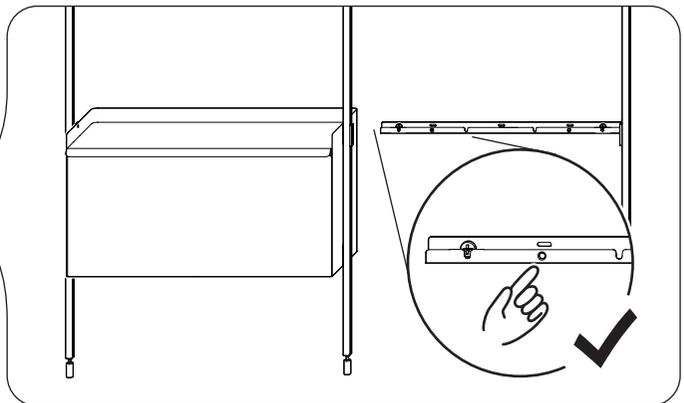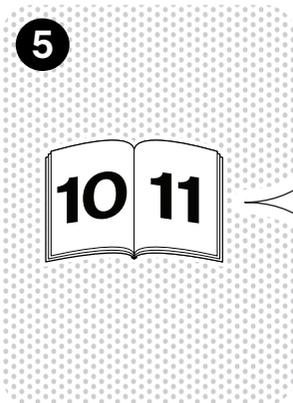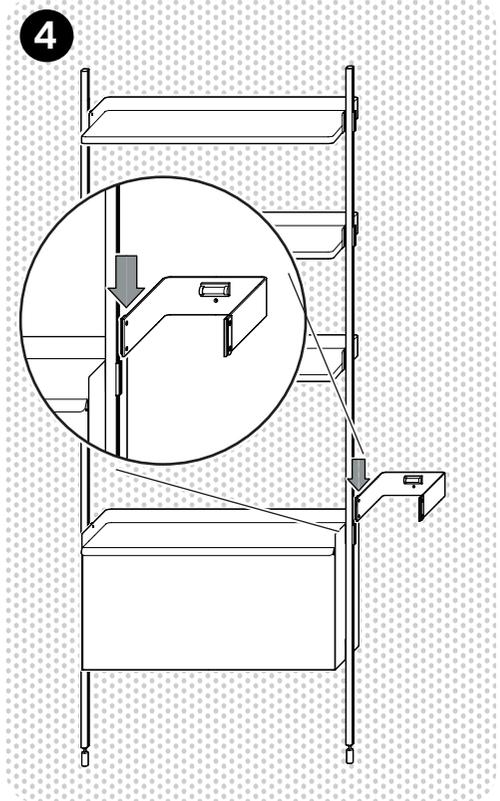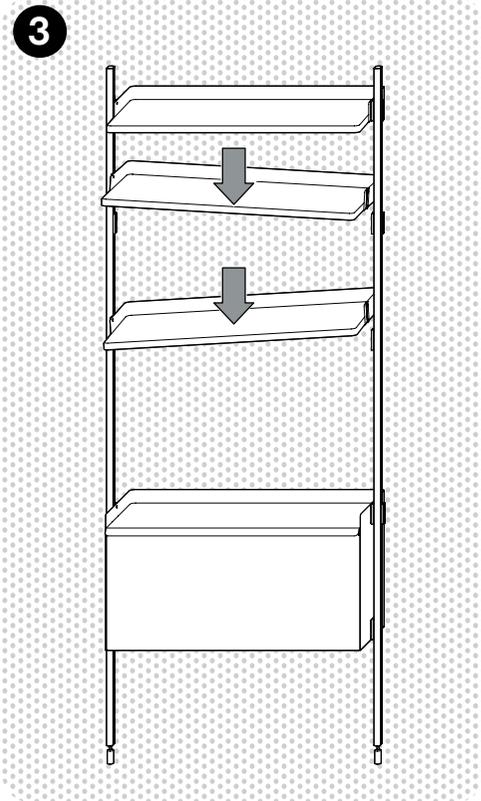

6. Slide the Work shelf **K** on. Since the right profile is not yet fastened, you need to be a minimum of two people to line everything up at once. Make sure the connectors on the back of the shelf go into the designated cut-outs on the wall bracket.

7. Secure the work shelf by inserting screws **L** on the underside of the shelf, and tighten them with Allen key **D**.

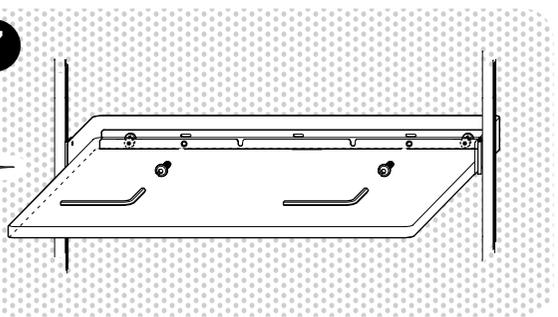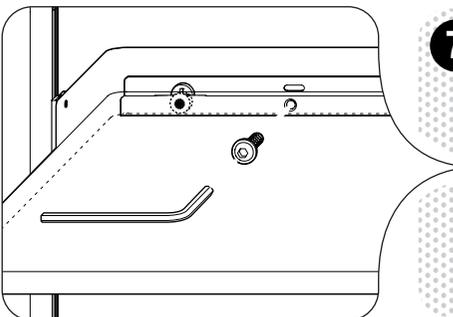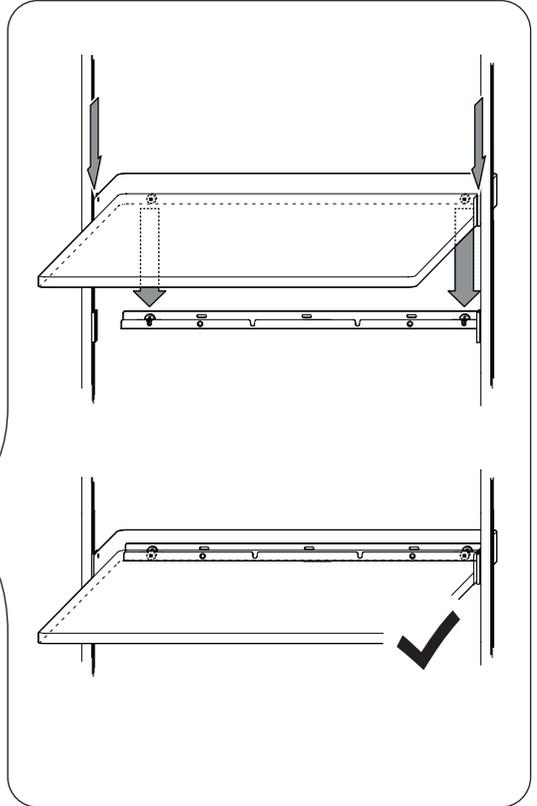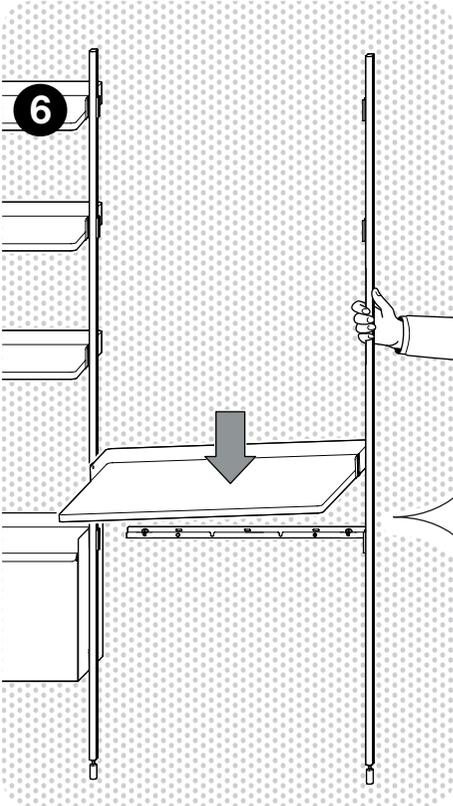





8. Slide the Mounting tool **E** into the top connector of the middle profile.


9. Go back to pages 10-11 and follow the instructions to mount the next wall bracket.

10. Slide the next two shelves into the connectors in the profiles. Make sure the connectors on the back of the top shelves

go into the designated cut-outs on the wall bracket.

11. Finally you can adjust the height of the feet of your shelving by first loosening the nut right under the profile. Use the provided Wrench **Q**. Then turn the glider to bring it up or down. Tighten the nut when you have reached the desired height.


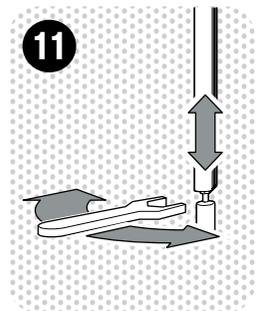
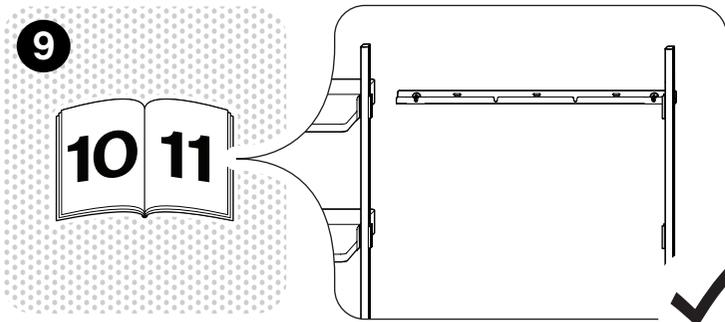
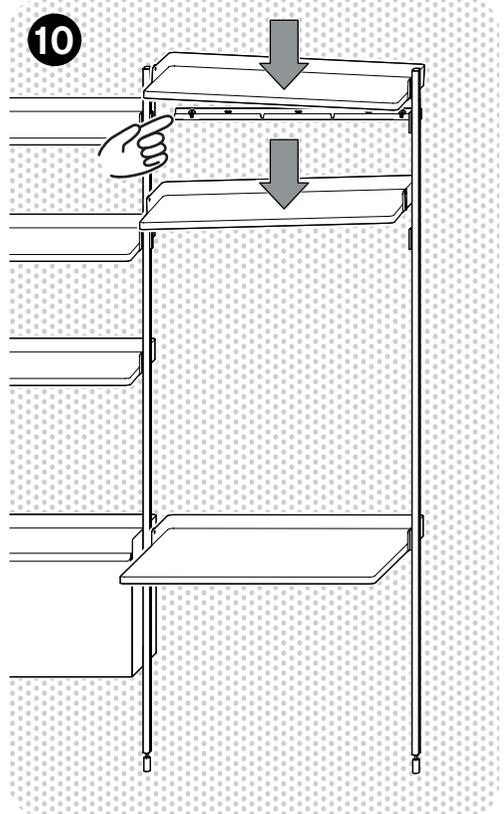
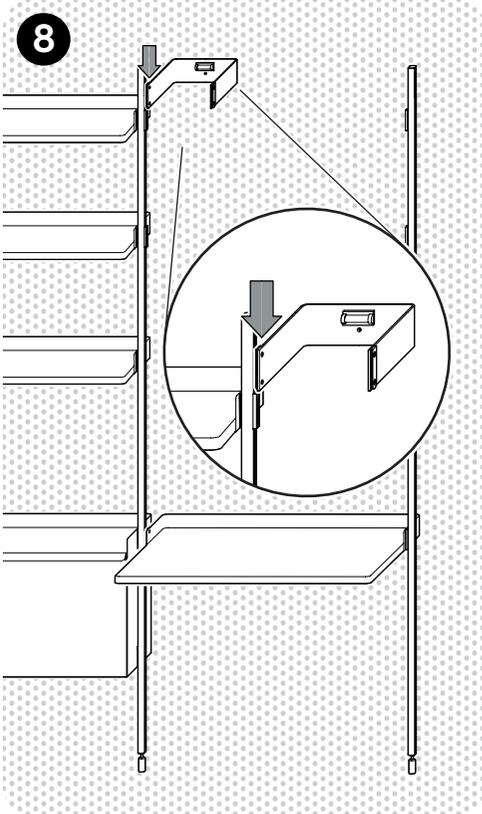




### CONFIGURATION 3

Make sure to have finished the first step with mounting all connectors on the profiles before going ahead with the next step.


1. Slide the Mounting tool **E** into the top connector on the first profile.
2. Go back to pages 10-11 and follow the instructions to mount the wall bracket.
3. After mounting the wall bracket, remove the two connectors as illustrated.

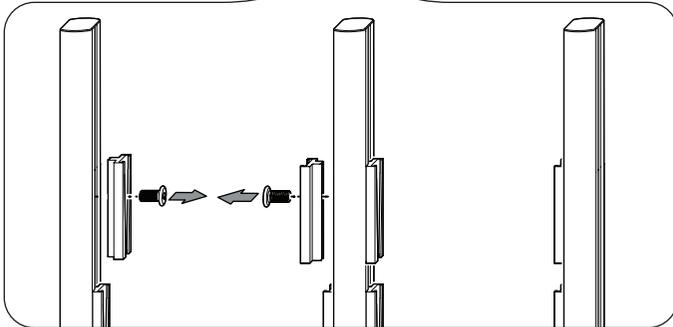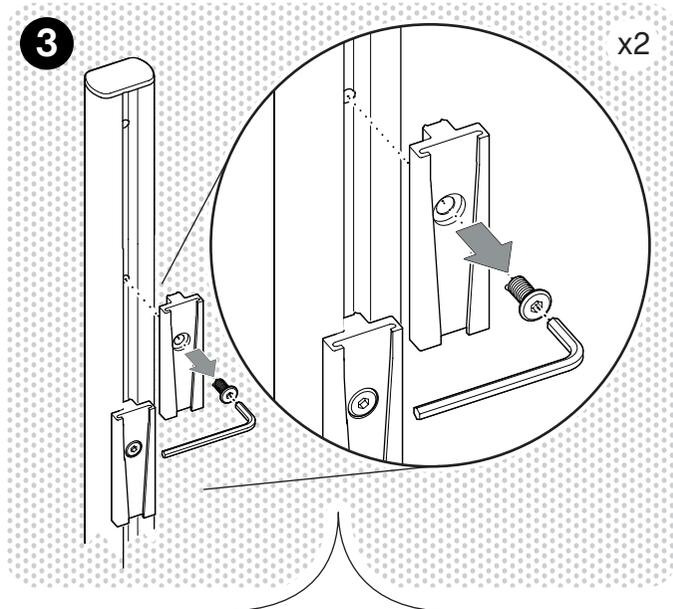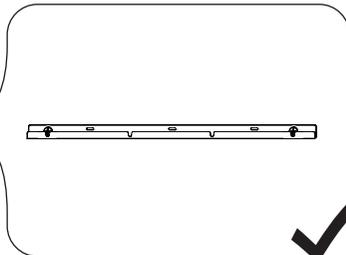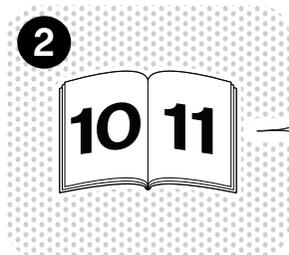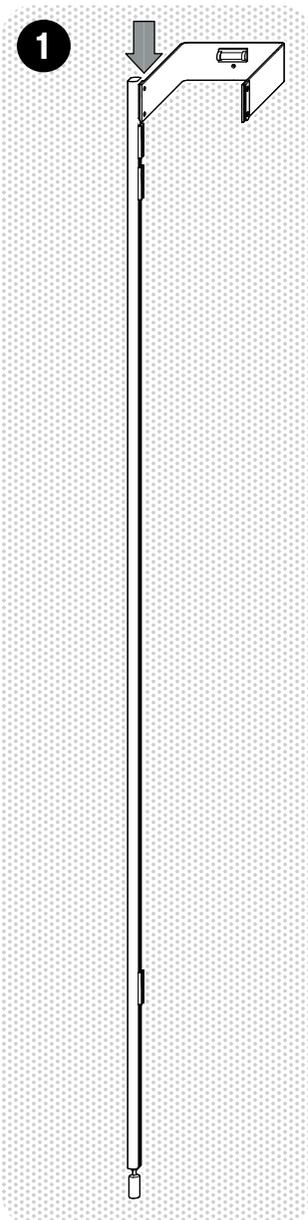


4. Slide the Wire shelf **O** and Coat rack **M** into the connectors on the profiles.

5. Rescrew the connectors that were removed in STEP 3.

4



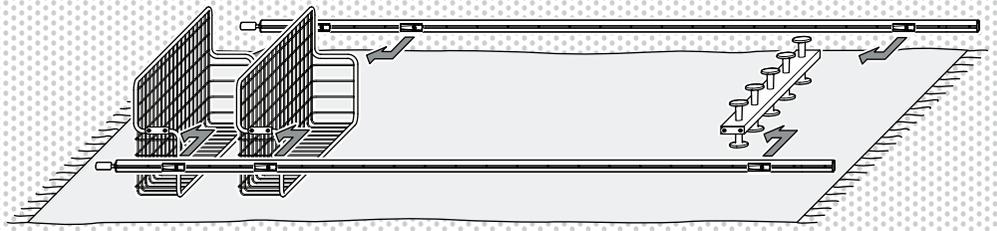


5

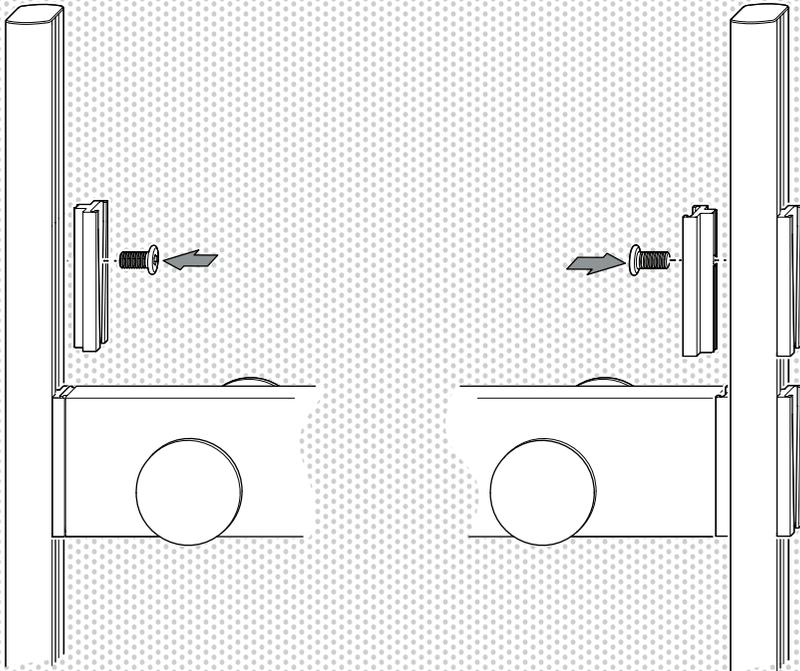



6. Slide a Shelf **I** into the top connectors on the profiles. Make sure the connectors on the back of the shelf go into the designated cut-outs on the wall bracket.

7. Slide the Mounting tool **E** into the top connector on the middle profile.

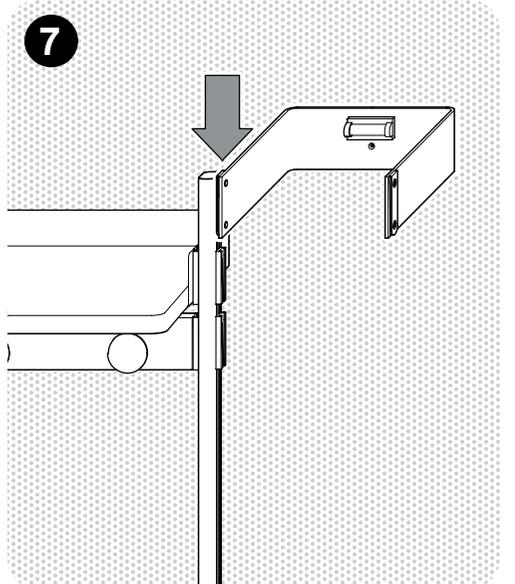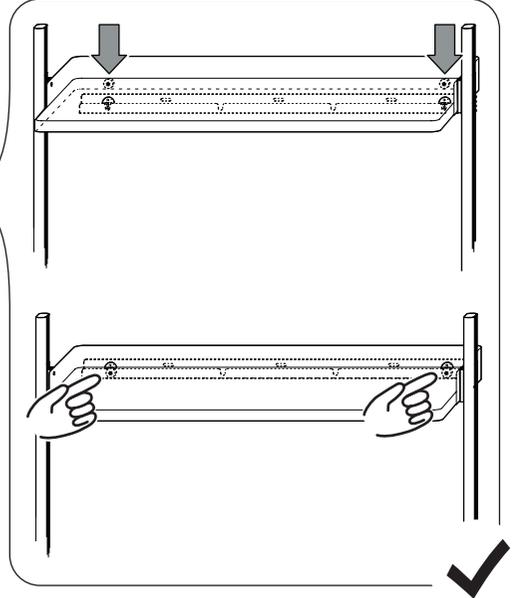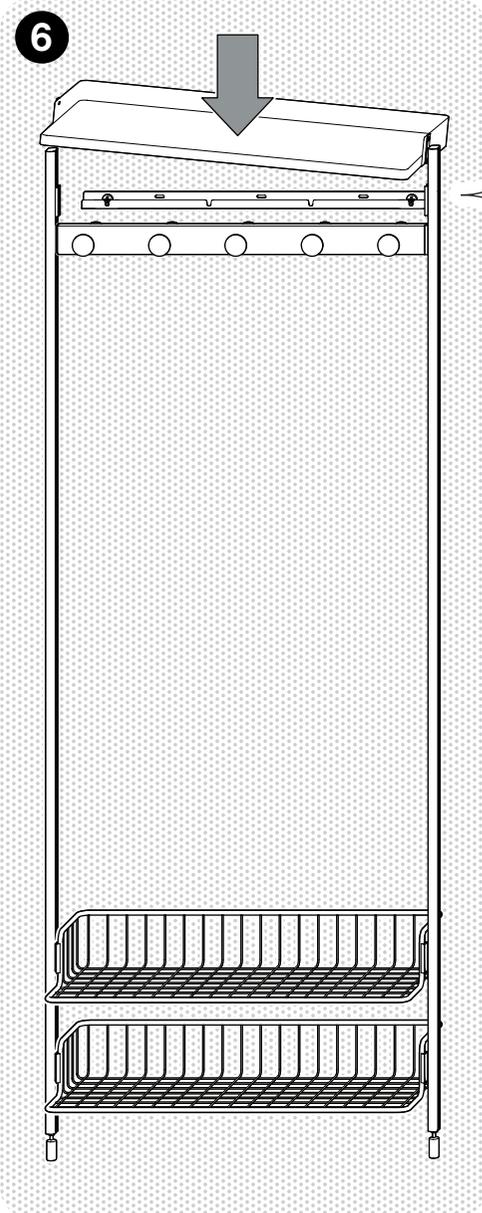

8. Go back to pages 10-11 and follow the instructions to mount the next wall bracket.

9. After mounting the wall bracket, remove the two connectors as illustrated.

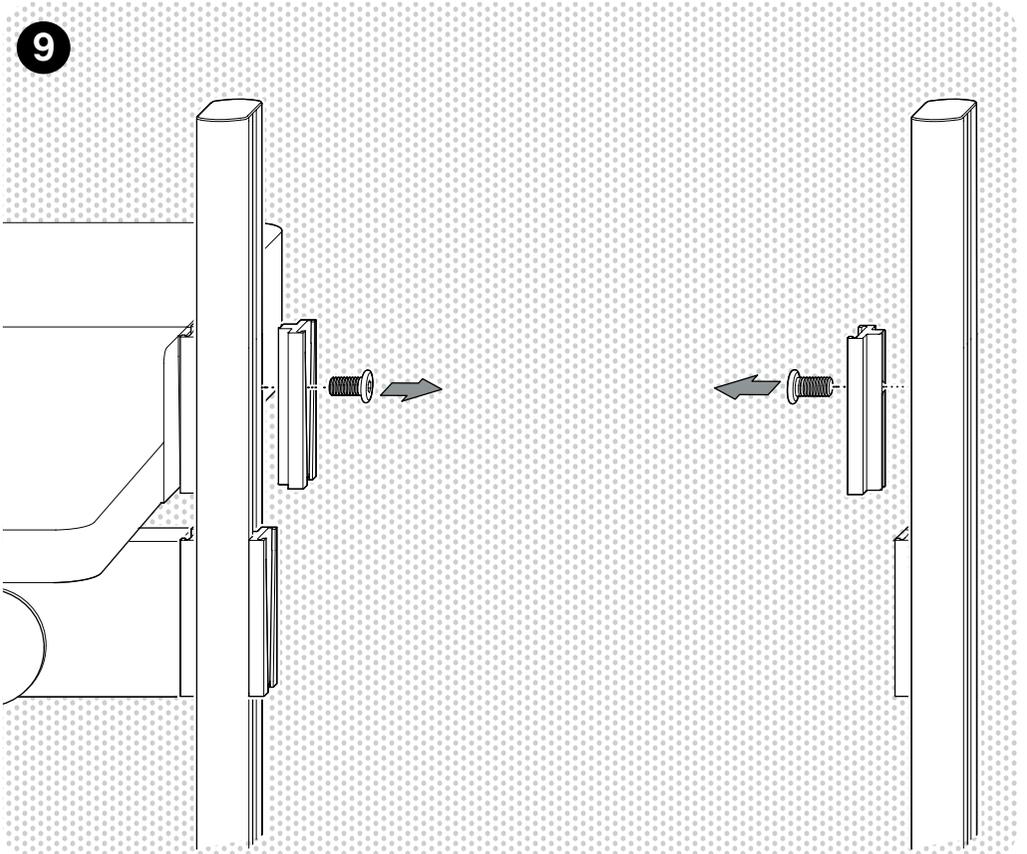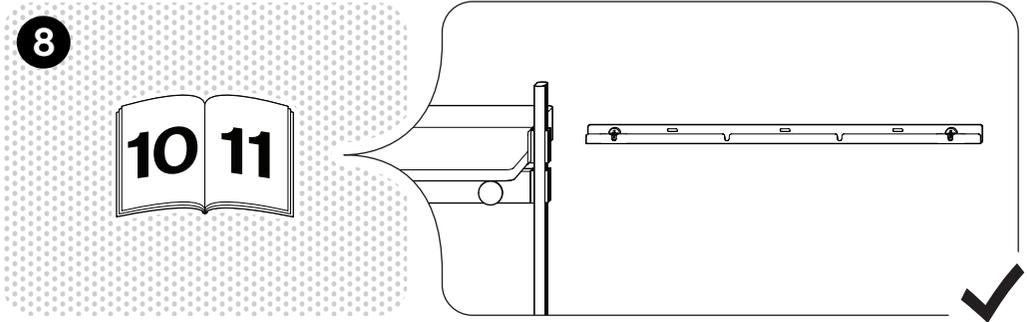


10. Slide a Wire shelf  into the connector on the profile.

11. Slide the wire shelf with the profile into the connectors on the middle profile. Then add the second wire shelf and the coat rack.

10







11

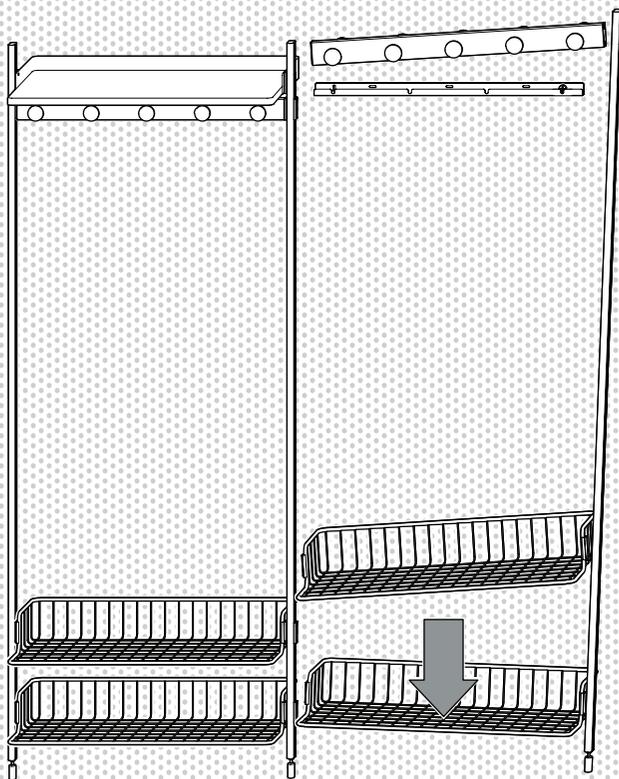

12. Rescrew the connectors that were removed in STEP 9.

13. Slide the top shelf into the connectors on the profiles. Make sure the connectors on the back of the shelf go into the designated cut-outs on the wall bracket.

Finally, you can adjust the height of the feet of your shelving by first loosening the nut right under the profile. Use the provided Wrench **Q**. Then turn the glider to bring it up or down. Tighten the nut when you have reached the desired height.

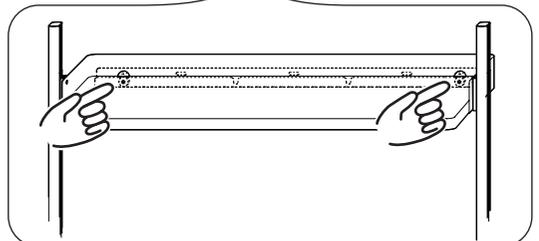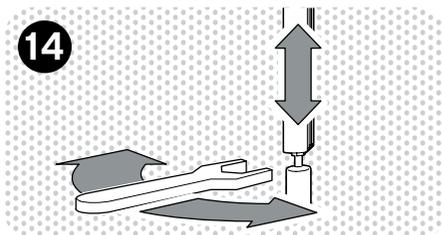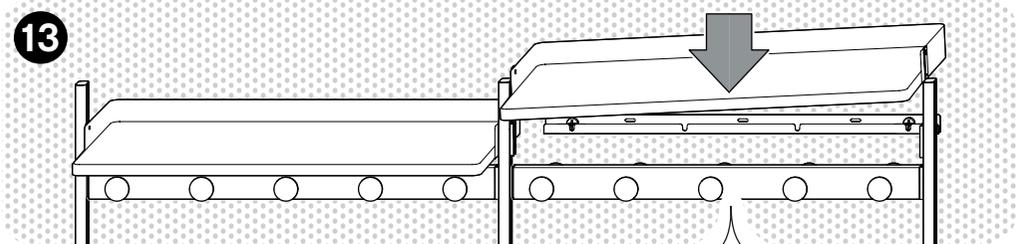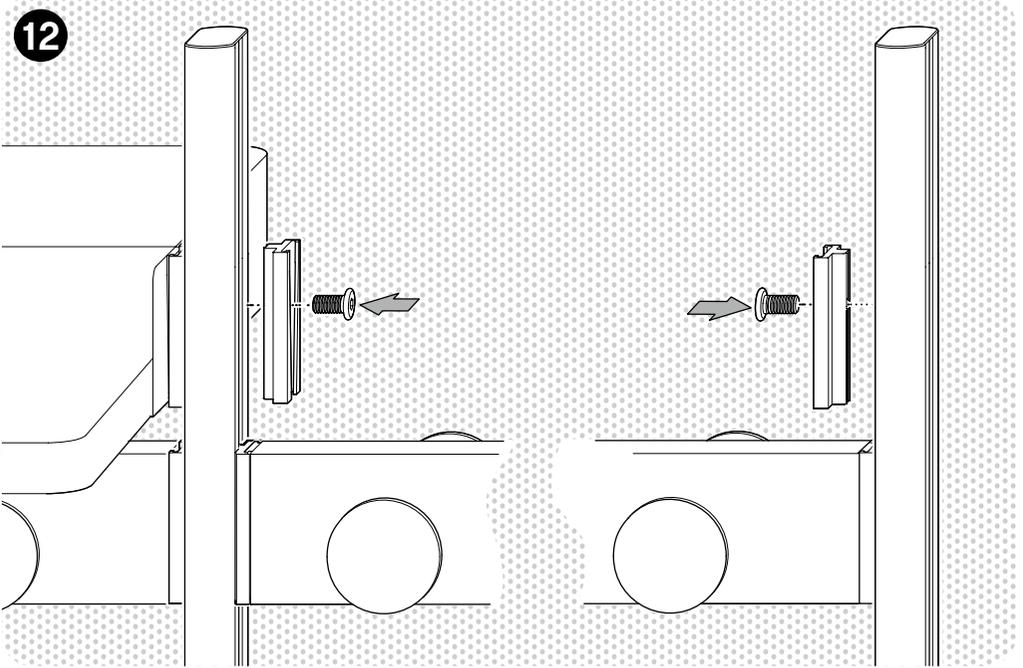

- CARE & MAINTENANCE -

Our Care & Maintenance offers guidance for optimal maintenance of your HAY product. It includes advice and instructions on cleaning and caring for specific materials to prolong the life of your furniture.



Please find our Care & Maintenance guide by scanning the QR code



You can find more relevant information on Pier System by scanning the QR code

You can also find the same information here  
[hay.dk/downloads](http://hay.dk/downloads)











Havnen 1 8700 Horsens Denmark  
+45 4282 0282 / hay@hay.com

08/04/2022

**HAY**