

---

# BuzziSpot

## Product Specification Sheet

---

This document contains technical information about the BuzziSpot

---



[www.buzzi.space](http://www.buzzi.space)

## Sound absorbing round pouf

Meet the streamlined, curvy BuzziSpot: it cheers up any space.

A light, fun and sound absorbing little ottoman that exists in a smooth Flat or 3D rib finish. The soft textile covering is blissful to sit on whatever you are doing.

Design by BuzziSpace Studio

---

## General

- ◆ Flat | 3D
  - Filling: Acoustic foam
- 🌲 Upholstered in: Fabric, Trevira CS+ | CS, Revive 1, Clara 2, Remix 3, Hero, Tonus 4, Memory 2
  - Bottom: Antiskid, Wood, Wheels
- ☁️ Dry usage
- 🔧 Assembled

---

## Acoustics



Absorption



Diffusion



Low tone



Mid tone



High tone

---

## Content

Configurations	3
Components	4
Fabrics	5
Dimensions	8
Acoustics	9

# Configurations

---

## BuzziSpot Flat


Flat

Filling: Acoustic foam

Upholstery in Fabric, Trevira CS+ | CS, Revive 1, Velvet, Clara 2, Remix 3, Hero, Tonus 4, Memory 2  
Bottom: Antiskid, Wood, Wheels

	<b>Antiskid</b>	<b>Wood</b>	<b>Wheels</b>	
✂	H 47 cm H 18.50"	H 50 cm H 19.69"	H 50 cm H 19.69	Ø 47 cm Ø 18.50"

	<b>Antiskid</b>	<b>Wood</b>	<b>Wheels</b>
⚖	3,2 kg 7.05 lbs	5 kg 11.02 lbs	5,3 kg 11.68 lbs

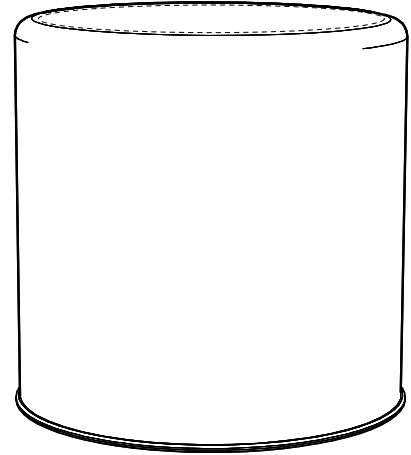

---

## BuzziSpot 3D


3D

Filling: Acoustic foam

Upholstery in Fabric, Trevira CS+ | CS, Revive 1, Clara 2, Remix 3, Hero, Tonus 4, Memory 2  
Bottom: Antiskid, Wood, Wheels

	<b>Antiskid</b>	<b>Wood</b>	<b>Wheels</b>	
✂	H 47 cm H 18.50"	H 50 cm H 19.69"	H 50 cm H 19.69	Ø 47 cm Ø 18.50"

	<b>Antiskid</b>	<b>Wood</b>	<b>Wheels</b>
⚖	3,4 kg 7.50 lbs	5,2 kg 11.46 lbs	5,5 kg 12.13 lbs

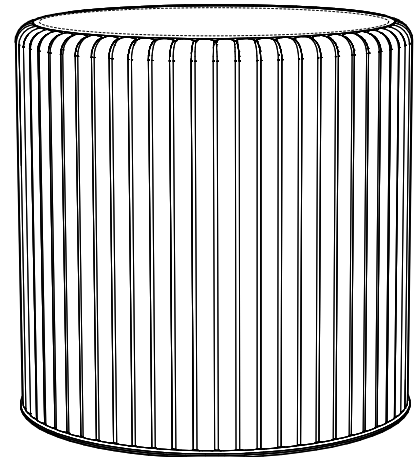


# Components

---


## Bottom

### Antiskid




Bottom:  
Antiskid

### Wood




Bottom:  
Black MDF  
5 Plastic Feet

### Wheels




Bottom:  
Poplar multiplex  
MDF covered with antiskid  
5 Wheels  
(load capacity: 40 kg | 88.18 lbs  
per wheel)

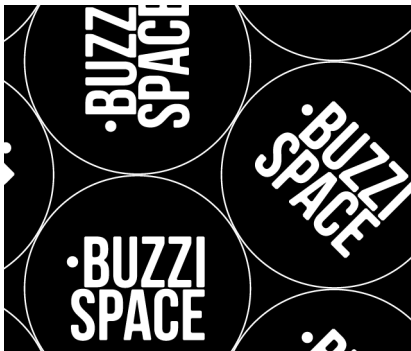

# Fabrics

## Fabric



**Category A**

**Composition** 70% Recycled Wool, 25% Recycled Polyacryl,  
5% Recycled Other Fabrics

**Weight** 405 g/m<sup>2</sup> | 11.94 oz/yd<sup>2</sup>

**Abrasion resistance** 40.000 Martindale, 50,000 Wyzenbeek

**Flammability** EU: EN 1021.1/2006 | BS EN 1021.1/2006 (cigarette).  
EN 1021.2/2006 | BS EN 1021.2/2006 (match)  
USA: CAL TB 117 | ASTM E84 CLASS A


**Fastness to light** EU: 4 | USA 4

**Fastness to rubbing** EU: Wet 3-4 | Dry 4-5

**Fastness to crocking** USA: Wet 5 | Dry 5



## Trevira CS+ | CS



**Category A**

**Weight** 420 g/m<sup>2</sup> | 12.39 oz/yd<sup>2</sup>

**Composition** 100% Polyester, Trevira CS

**Abrasion resistance** 100.000 Martindale, 90,000 Wyzenbeek

**Flammability** BS 5852 part II: CRIB 5 | BS 7176 Medium Hazard  
USA: CAL TB 117 | M1 | B1 | EN 1021/1-2 | C1 |  
IMO Res. A652 (16)

**Fastness to light** EU: 6 | USA 5


**Fastness to rubbing** EU: Wet 4-5 | Dry 4-5

**Fastness to crocking** USA: Wet 5 | Dry 5



## Revive 1

kvadrat



**Category A**

**Composition** 100% recycled polyester FR

**Weight** 430 g/lin.m

**Abrasion resistance** 60.000 Martindale rubs, EN ISO 12947

**Flammability** EN 1021-1/2 | DIN 4102 B1 | Önorm B1/Q1  
UNI 9175 11M | US Cal. Tech. Bull. 117  
IMO A.652 (16)


**Fastness to light** Note 5-7, ISO 105-B02

**Fastness to rubbing** (ISO) dry 5, wet 4-5

**Pilling** Note 4-5, EN ISO 12945




## Velvet (not for 3D)



**Category B**  
**Composition** 100% PES  
**Weight** 375 g/m<sup>2</sup> | 11.06 oz/yd<sup>2</sup>  
**Abrasion resistance** > 100.000 Martindale  
**Fastness to light** EU: 4-5  
**Fastness to rubbing** EU: Wet 4 | Dry 4-5  
**Pilling** EU: 4-5

## Clara 2

kvadrat



**Category B**  
**Composition** 92% new wool, 8% nylon  
**Weight** 400 g/lin.m  
**Abrasion resistance** 80.000 Martindale rubs, EN ISO 12947  
**Flammability** EN 1021-1/2 | BS 5852, ignition source 2-3 | DIN 4102 B2  
NF D 60 013 | UNI 9175 11M | US Cal. Tech. Bull. 117, Sec. E  
NFPA 260 | IMO A.652(16)  
**Fastness to light** Note 5-7, ISO 105-B02  
**Fastness to rubbing** (ISO) dry 4-5, wet 4  
**Pilling** Note 4, EN ISO 12945



## Remix 3

kvadrat




**Category B**  
**Composition** 90% new wool, 10% nylon  
**Weight** 415 g/lin.m  
**Abrasion resistance** 100.000 Martindale rubs, EN ISO 12947  
**Flammability** EN 1021-1/2 | BS 5852 part 1  
Önorm B1/Q1 | NF D 60 013 | UNI 9175, 11M  
AS/NZS 1530.3 | Cal. Tech. Bull. 117-2013  
NFPA 260 | IMO FTP Code 2010:Part 8  
**Fastness to light** Note 5-7, ISO 105-B02  
**Fastness to rubbing** (ISO) dry 4-5, wet 4  
**Pilling** Note 4, EN ISO 12945



## Hero

kvadrat




**Category C**  
**Composition** 96% new wool, 4% nylon  
**Weight** 580 g/lin.m  
**Abrasion resistance** 45.000 Martindale rubs, EN ISO 12947  
**Flammability** EN 1021-1/2 | DIN 4102 B2 | NF D 60 013  
UNI 9175 11M | US Cal. Bull. 117-2013 | NFPA 260  
IMO A.652 (16)  
**Fastness to light** Note 5-6, ISO 105-B02  
**Fastness to rubbing** (ISO) dry 4-5, wet 4-5  
**Pilling** Note 3-4, EN ISO 12945



## Tonus 4

kvadrat



**Category** D

**Composition** 90% new wool, 10% Helanca

**Weight** 665 g/lin.m

**Abrasion resistance** 100.000 Martindale rubs, EN ISO 12947

**Flammability** EN 1021-1/2 | BS 5852 part 1 | DIN 4102 B2

Önorm B1/Q1 | NF D 60 013 | UNI 9175 11M

US Cal. Bull. 117-2013 | NFPA 260 | IMO A.652 (16)

**Fastness to light** Note 5-7, ISO 105-B02


**Fastness to rubbing** (ISO) dry 3-5, wet 3-5

**Pilling** Note 3, EN ISO 12945



## Memory 2

kvadrat



**Category** E

**Composition** 100% Trevira CS

**Weight** 700 g/lin.m

**Abrasion resistance**

35.000 rubs acc. to the Martindale method, EN ISO 12947

**Flammability** EN 1021-1/2 | DIN 4102 B1 | Önorm B1/Q1

NF D 60 013 | NF P 92 507 M1 | UNI 9175 11M

UNI 9177 classe 1 | US Cal. Tech. Bull. 117

IMO A.652 (16)

**Fastness to light** Note 5-8, ISO 105-B02



**Fastness to rubbing** (ISO) dry 4-5, wet 4-5

**Pilling** Note 4, EN ISO 12945





# Dimensions


## Spot Flat

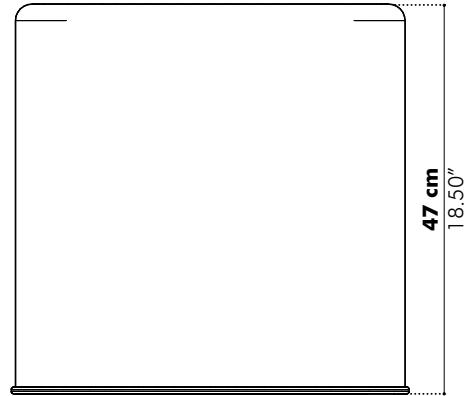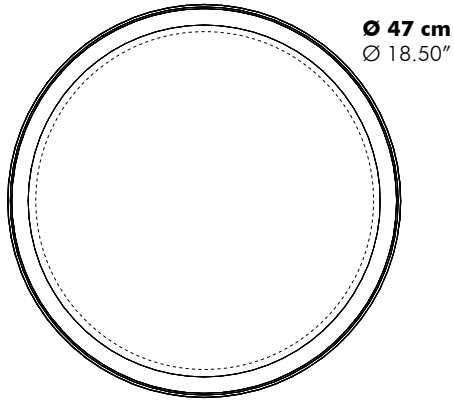


## Spot 3D

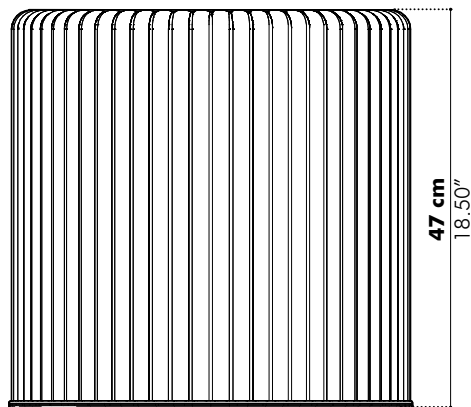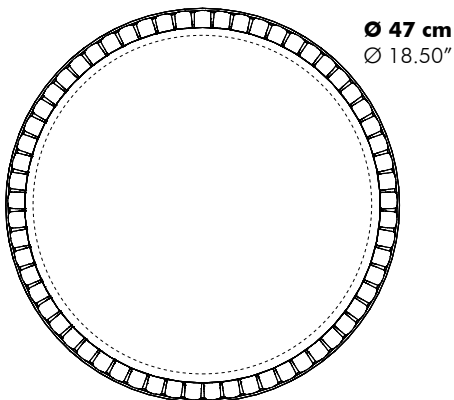


### Antiskid



### Wood



### Wheels





# Acoustics

## BuzziSpot Flat | 3D

Equivalent sound absorption area in m<sup>2</sup> per object

