



---

# BuzziSkin

## Product Specification Sheet


---

This document contains technical information about the BuzziSkin

---



[www.buzzi.space](http://www.buzzi.space)

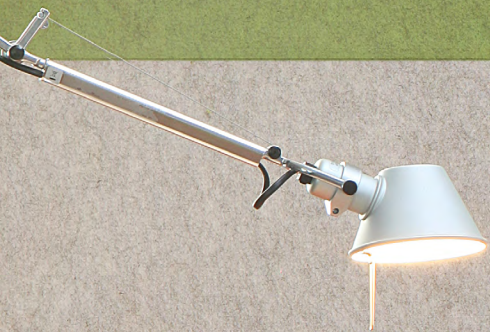



## Felt with self-adhesive backing

What would your perfect wall be like? Cuddly and sound absorbing? A surface you can pin photos to? Available in striking colors and easy to install? Environmentally friendly? Now you can have all these things at once! BuzziSkin has everything it takes to improve any interior at home or at work. It is available on handy, self-adhesive rolls.

Design by Sas Adriaenssens

---

## General



BuzziSkin



Front: BuzziSkin  
Back: Self-adhesive



Roll: 10 m x 0,98 m | 393.70" x 38.58"  
Thickness: 6 mm + 0,1 mm self-adhesive | 0.24" + 0.04" self-adhesive



1 Roll: 11 kg | 24.25 lbs  
1000g/sqm | 29.49 oz/sqyd

We do not recommend installing BuzziSkin on the ceiling or the floor or any glass surfaces. BuzziSkin is not suitable as a seating surface because it will become fluffy.



Treat the surface with water-based primer before applying BuzziSkin for optimal adhesion results.  
BuzziSkin can not be applied on vinyl or any other plasticized surface.  
No claims concerning deviation in color, size, and thickness can be accepted.  
This can vary depending on the nature of the product. The risk is more likely in different batches.

---

## Certifications



---

## Acoustics



Absorption



High tone

---

## Content

Configurations	3
Fabrics	4
Dimensions	5
Acoustics	6

# Configuration

---

## BuzziSkin



Front: BuzziSkin  
Back: Self-adhesive



Roll: L: 10 m W 0,98 m | L 393.70" W 38.58"  
Thickness: 6 mm + 0,1 mm self-adhesive  
0.24" + 0.04" self-adhesive



1 Roll: 11 kg | 24.25 lbs  
1000g/sqm | 29.49 oz/sqyd

We do not recommend installing BuzziSkin on the ceiling or the floor or any glass surfaces. BuzziSkin is not suitable as a seating surface because it will become fluffy.

Treat the surface with water-based primer before applying BuzziSkin for optimal adhesion results.



BuzziSkin can not be applied on vinyl or any other plasticized surface.

No claims concerning deviation in color, size, and thickness can be accepted.

This can vary depending on the nature of the product. The risk is more likely in different batches.



# Fabrics

---

## Skin


**Composition** 100% Recycled P.E.T. Felt, selfadhesive backing

**Weight** 1 Roll: 11 kg | 24.25 lbs  
1000g/sqm | 29.49 oz/sqyd


**Abrasion resistance** >7.000 Martindale

**Flammability** EU: EN 13501.1:2013 Class C-s2,d0  
USA: ASTM E84 Class A certified


**Fastness to light** USA 5




SK-Jeans 75



SK-StoneGrey 67




SK-LightBlue 60



SK-Curry 61




SK-OffWhite 63




SK-Mokka 74




SK-EcoBrown 58




SK-Lime 64



SK-Orange 66




SK-Red 59



SK-Anthracite 68

# Dimensions


Length: 10m | 393.70"  
Thickness: 6 mm | 0.24"

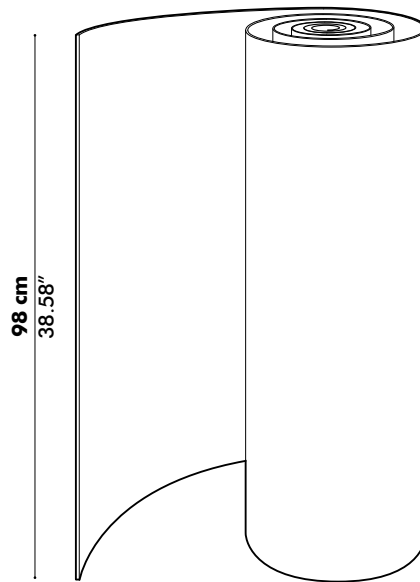

# Acoustics

## BuzziSkin

### Absorption coefficient

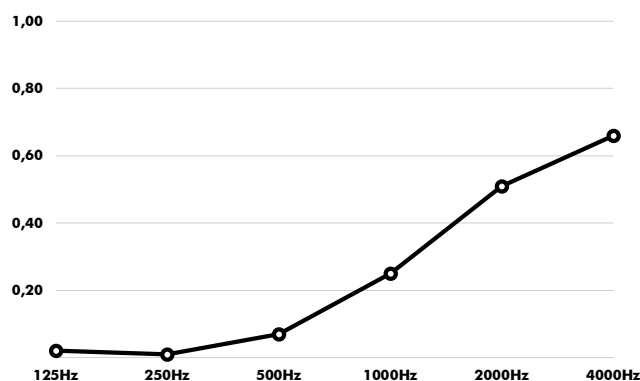

Hz	$\alpha^s$
125	0.02
250	0.01
500	0.07
1000	0.25
2000	0.51
4000	0.66

### Absorption Values

$\alpha_w$   
(ISO 11654) **0.15**

NRC  
(ASTM - C423) **0.20**

SAA  
(ASTM-C423) **0.21**

## Glossary

All calculations are based on accredited lab measurements, official document available on Buzzi.Space

### Definitions

<b><math>\alpha</math></b>	Weighted absorption coefficient	(ISO 11654)
<b>NRC</b>	Noise reduction coefficient	(ASTM - C423)
<b>SAA</b>	Sound absorption average	(ASTM - C423)

### Classification of sound absorbers NEN-EN-ISO 11654

- A** 0.90 | 0.95 | 1.0
- B** 0.80 | 0.85
- C** 0.60 | 0.65 | 0.70 | 0.75
- D** 0.03 | 0.55
- E** 0.15 | 0.25