



ECHO**JAZZ** AG  
RINGSTRASSE 25  
6010 KRIENS  
SWITZERLAND  
[WWW.ECHO\*\*JAZZ\*\*.COM](http://WWW.ECHO<b>JAZZ</b>.COM)  
+41 41 340 18 80  
[INFO@ECHO\*\*JAZZ\*\*.COM](mailto:INFO@ECHO<b>JAZZ</b>.COM)

# ECHOBOARD® 12MM DATASHEET

# TABLE OF CONTENTS



ECHOBOARD® 12MM.....1

TENDER TEXT .....3

DATASHEET ECHOBOARD® 12MM .....4

COLOURS ECHOBOARD® 12MM .....5

DIMENSIONS & PARTS.....6

CLEANING & CARE.....7

## PRODUCT NAME

EchoBoard® 12mm

## DESCRIPTION

High-performance acoustic sound absorber with textile surface made of 100% PET.

EchoBoard® 12mm is made of robust high-tech felt with homogeneous texture and colour throughout. This sound absorber with a recycled PET content of over 50% is ideal for functional and aesthetic acoustic solutions and a direct answer to questions about ecological and economic sustainability that arise in contemporary interior design, interior decoration and renovation.

## PRODUCT PROPERTIES

Dimensions: 1200x2800mm

Thickness: 12mm

Weight: 2400g/m<sup>2</sup> (± 10%)

## ACOUSTIC PERFORMANCE

aw: 0.30 - 0.90

NRC: 0.45 - 0.85

## INSTALLATION

- Quick installation with EchoGlue® contact adhesive
- Suitable for use in rooms as well as roofed outdoor areas
- Very easy to trim with a knife

## MATERIAL PROPERTIES

- Homogeneous edges throughout
- Extremely robust and shockproof
- Very high colour fastness of the all-round homogeneous textile surface available over 10 colours
- Flame retardant. B-s1,d0 certified according to EN 13501
- Extremely low volatile organic compounds below < 0.5mg/m<sup>2</sup>/h, certified according to ASTM D5116
- Formaldehyde emission below < 0.1mg/m<sup>2</sup>/h, certified according to ASTM D5116
- Dimensionally stable up to 50°C and 95%rH
- Melting point: 250 °C
- Decomposition Temp: > 250 °C
- Alkalinity: pH: 7.8 (pH 7 is neutral)

## CLEANING & CARE

Can be cleaned dry and damp with chlorine or hydrogen peroxide.

## ENVIRONMENT

- 100% PET with a content of over 50% from recycled PET bottles
- 100% recyclable
- eco-1 rating within eco-bau & Minergie-Eco requirements
- Cradle to Cradle Bronze certified

## DISPOSAL

The product is recyclable as part of ECHOJAZZ's stewardship programme.

# DATASHEET ECHOBOARD® 12MM




EchoBoard® 12mm is a high quality sound absorber with an  $\alpha_w$  of up to 0.90 and a NRC of up to 0.85, which can be used for acoustic ceilings, walls, office desks or room dividers.

NAME	EchoBoard® 12mm																																
DIMENSIONS	1200mm (± 1mm) x 2800mm (± 1mm)																																
COMPOSITION	100% PET (> 50% recycled PET)																																
PET-BOTTLES* PER PANEL	168 PET-Bottles *The number of PET bottles refers to 500ml PET bottles with a bottle weight of 24g.																																
WEIGHT	2400g/m² (± 10%)																																
MATERIAL THICKNESS	12mm																																
LIGHT FASTNESS ISO 105-B02-1994	> 7																																
FIRE PROTECTION EN 13501	B-s1, d0																																
VOC EMISSIONS ASTM D5116	< 0.5mg/m²/h																																
FORMALDEHYDE EMISSIONS ASTM D5116	< 0.1mg/m²/h																																
ENVIRONMENTAL CERTIFICATES	eco1 Minergie-Eco Cradle to Cradle Certified® Bronze M1 emission-free materials																																
ABSORPTION COEFFICIENT DIN EN ISO 11654 ASTM C423	aw 0.30 (direct mounting) aw 0.60 (50mm wall/ceiling distance) aw 0.90 (200mm wall/ceiling distance)  NRC = 0.45 (direct mounting) NRC = 0.70 (50mm wall/ceiling distance) NRC = 0.85 (200mm wall/ceiling distance)																																
COLOURS	> 10																																
ABSORPTION GRAPH	<div><table><caption>Approximate data points from the Absorption Graph</caption><thead><tr><th>Frequency (Hz)</th><th>Direct Mount (Green)</th><th>50mm Distance (Yellow)</th><th>200mm Distance (Blue)</th></tr></thead><tbody><tr><td>125</td><td>0.02</td><td>0.10</td><td>0.50</td></tr><tr><td>250</td><td>0.05</td><td>0.25</td><td>0.80</td></tr><tr><td>500</td><td>0.15</td><td>0.60</td><td>0.95</td></tr><tr><td>1000</td><td>0.40</td><td>0.95</td><td>0.80</td></tr><tr><td>1500</td><td>0.70</td><td>1.00</td><td>0.90</td></tr><tr><td>2000</td><td>0.85</td><td>0.95</td><td>0.95</td></tr><tr><td>4000</td><td>1.00</td><td>0.95</td><td>0.95</td></tr></tbody></table></div> <div><div>— Sound absorption coefficient (direct mount)</div><div>— Sound absorption coefficient (50mm)</div><div>— Sound absorption coefficient (200mm)</div></div>	Frequency (Hz)	Direct Mount (Green)	50mm Distance (Yellow)	200mm Distance (Blue)	125	0.02	0.10	0.50	250	0.05	0.25	0.80	500	0.15	0.60	0.95	1000	0.40	0.95	0.80	1500	0.70	1.00	0.90	2000	0.85	0.95	0.95	4000	1.00	0.95	0.95
Frequency (Hz)	Direct Mount (Green)	50mm Distance (Yellow)	200mm Distance (Blue)																														
125	0.02	0.10	0.50																														
250	0.05	0.25	0.80																														
500	0.15	0.60	0.95																														
1000	0.40	0.95	0.80																														
1500	0.70	1.00	0.90																														
2000	0.85	0.95	0.95																														
4000	1.00	0.95	0.95																														

# COLOURS ECHOBOARD® 12MM




## ECHOBOARD® 12MM

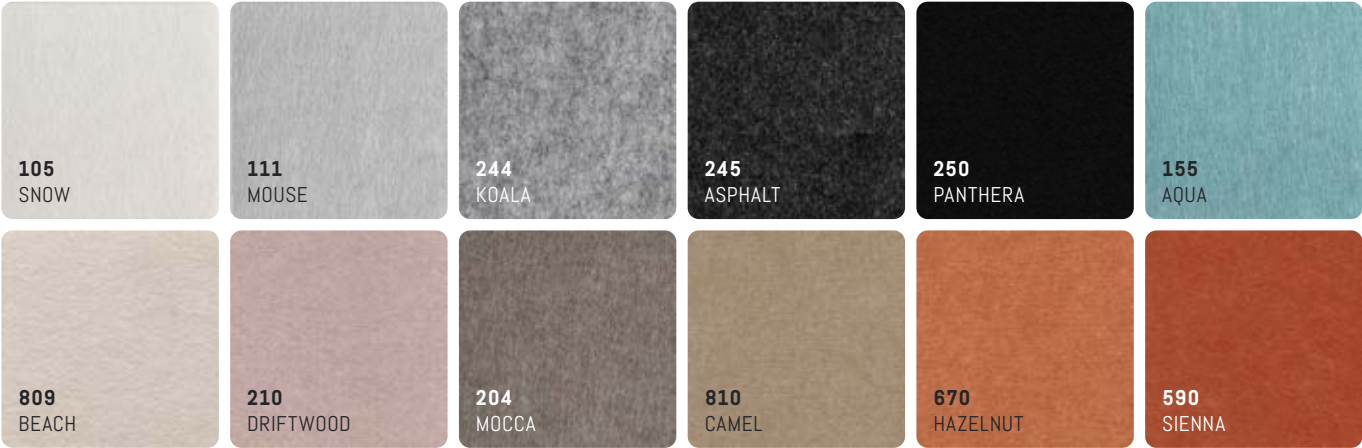

# DIMENSIONS & PARTS



ECHOBOARD® 12MM  
1001  
1200x2800x12mm

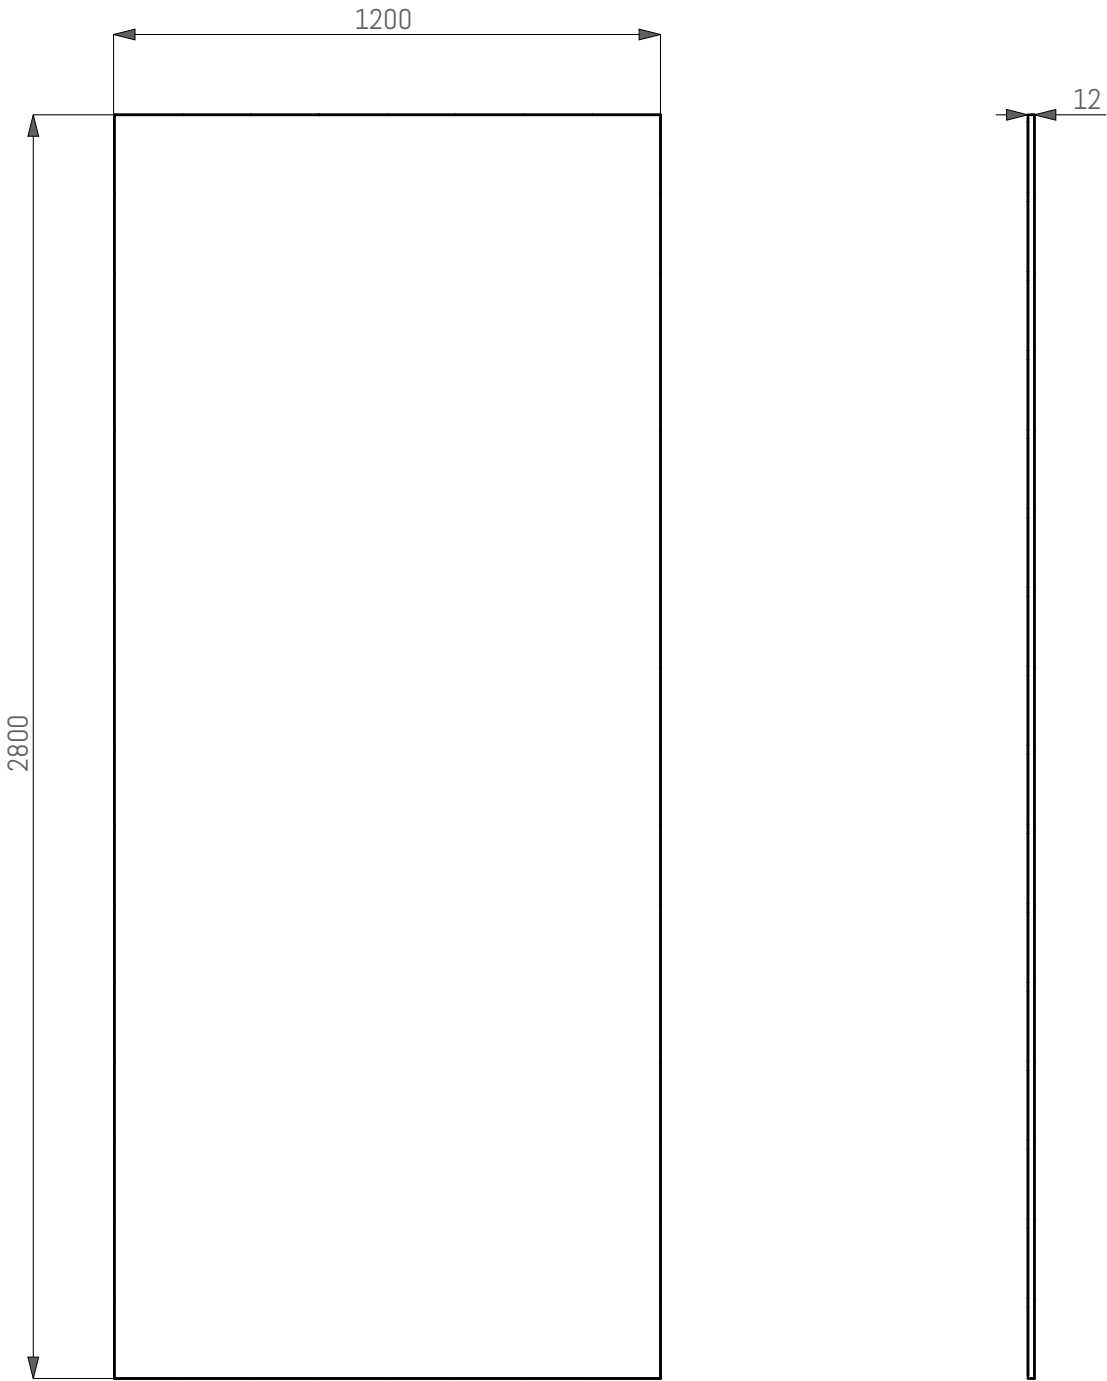

## SURFACE DISINFECTION

Spray disinfectants can be used for rapid surface disinfection.



## DUSTER/VACUUM CLEANER

For dusting use duster or vacuum cleaner.



## SPARKLING WATER

For slight contamination apply sparkling water to polluted area. Wipe carefully with a sponge.



## UPHOLSTERY CLEANER


For medium contamination apply upholstery cleaner to polluted area. Wipe carefully with a sponge.



## BLEACH

For heavy contamination apply bleach as chlorine or hydrogen peroxide on polluted area. Wipe carefully with a sponge and sparkling water.

Use of protection gloves and glasses is mandatory!

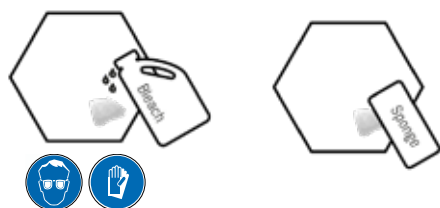

Please make first a cleaning attempt on an inconspicuous spot. Follow the instructions of the cleaning agents.