



Product Specification Sheet

BuzziMoon EU

— By BuzziSpace Studio

Embedded light

BuzziMoon offers the best of both worlds; highly functional general lighting embedded in a proven acoustic ceiling solution. One of the first acoustical lighting solutions that is equally performant on lighting as on acoustic level. The LED light module is designed specifically to answer the request of general lighting in office space. The Moon can be finished off in different fabrics and various 3D patterns.

The diffuser gives it a “full moon” lighting experience. BuzziMoon is equally available in EU and US.





The Family

Models

BuzziMoon Round

BuzziMoon Oval

LED Disk

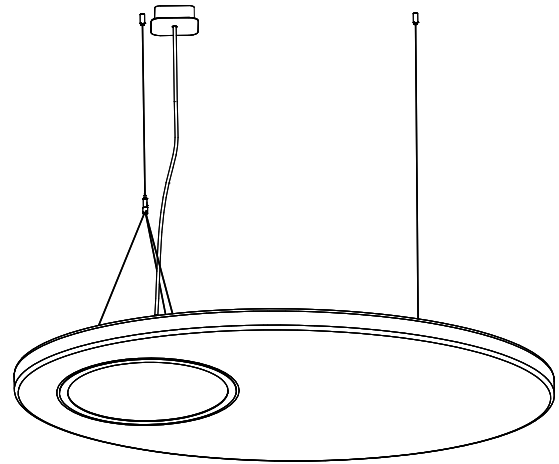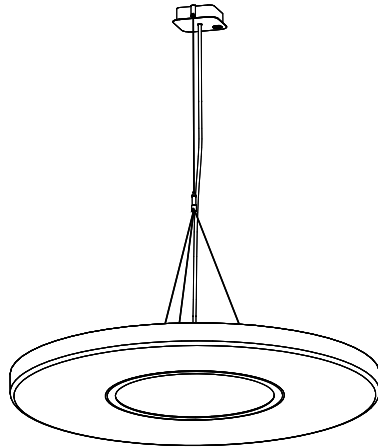


Required order information

1. Model
2. Size
3. Pattern
4. Fabric (CAT -> Collection -> Color)

Lighting Data

Lighting Unit

LED Disk

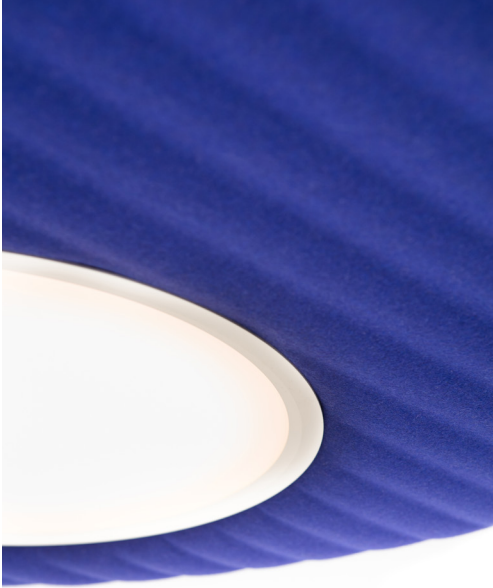

The BuzziMoon consist of a LED PCB solution containing mid power LED's to create an optimal light spread. The LED solution is available in a color temperature of 3000K or 4000K

Select a milky diffuser to achieve a diffuse light surface without any dottiness. Or select a prismatic diffuser to achieve an UGR value of 19. LED dots will be visible



UGR 22
Milky Diffuser



UGR 19
Prismatic Diffuser

BuzziMoon Lighting options

Models: Round | Oval | S | M | L Suspended

| Lighting Options | | | | Characteristics | | | Mounting |
|------------------|-------------------|---------------------|---------------|--|---|--|--|
| Voltage Input | Color Temperature | UGR (Diffuser type) | Dimming | Technical | Visual | Pattern | Options |
| 220-240V | 3000K | 22 (milky) | 1-10V Dali | Power consumption: 29W Light output: 2545 Lm Efficacy: 88 Lm/W CRI: > 90 | Color: Power Cable: Black Ceiling Canopy: Black | Flat, 3D Rib, 3D Drop*, 3D Leaf | Ceiling Suspended Straight: 3 cables 2 m 5 m Alu or Black Split: 1 cable splits in 3 2 m 5 m Alu or Black |
| | | 19 (prismatic)** | 1-10V Dali | Power consumption: 35W Light output: 3600 Lm Efficacy: 103 Lm/W CRI: > 90 | | | |
| | 4000K | 22 (milky) | 1-10V Dali | Power consumption: 29W Light output: 2860 Lm Efficacy: 99 Lm/W CRI: > 90 | | | |
| | | 19 (prismatic)** | 1-10V Dali | Power consumption: 35W Light output: 3660 Lm Efficacy: 105 Lm/W CRI: > 90 | | | |

BuzziMoon Lighting options

Models: Round | S | M | L Ceiling Mounted

| Options | | | | Characteristics | | | Mounting |
|---------------|-------------------|---------------------|---------------|--|--|-----------------|----------|
| Voltage Input | Color Temperature | UGR (Diffuser type) | Dimming | Technical | Pattern | Options | |
| 220-240V | 3000K | 22 (milky) | 1-10V Dali | Power consumption: 35W Light output: 3170 Lm Efficacy: 91 Lm/W CRI: > 90 | Flat, 3D Rib, 3D Drop*, 3D Leaf | Ceiling Mounted | |
| | | 19 (prismatic)** | 1-10V Dali | Power consumption: 35W Light output: 3600 Lm Efficacy: 103 Lm/W CRI: > 90 | | | |
| | 4000K | 22 (milky) | 1-10V Dali | Power consumption: 35W Light output: 3400 Lm Efficacy: 97 Lm/W CRI: > 90 | | | |
| | | 19 (prismatic)** | 1-10V Dali | Power consumption: 35W Light output: 3660 Lm Efficacy: 105 Lm/W CRI: > 90 | | | |




* 3D Drop not possible for Oval

** To achieve a UGR 19, the product is fitted with a Prismatic diffuser instead of a milky diffuser. LED dots will be visible.


Photometric Data

BuzziMoon LED Disk

LED Disk Cartesian diagram

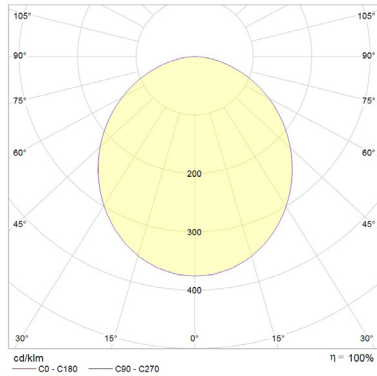





LED Disk Polar curve

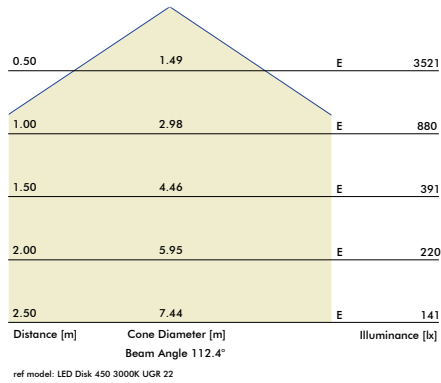

Tips and Tricks - Light Options

To enlight your workplace with optimal lux levels take following measurements into account:

BuzziMoon LED Disk

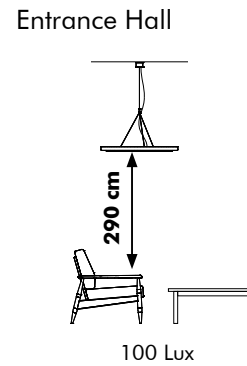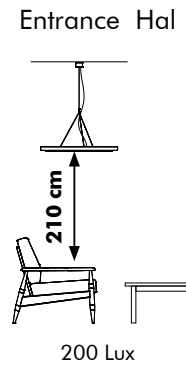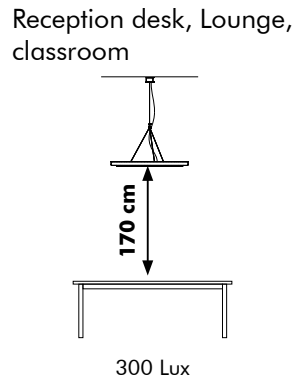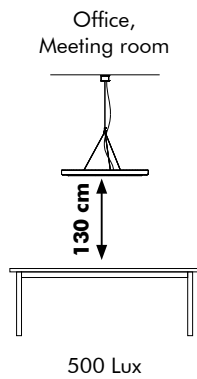


* According to EN12464

Product Data



Fixing System

Round

Ceiling Mounted



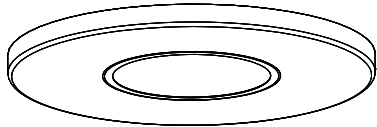


Ceiling Suspended Straight

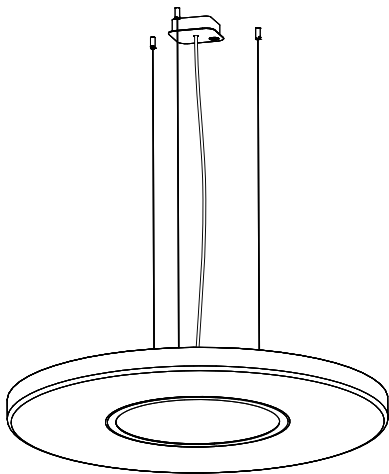

Ceiling Suspended Straight
Fixing System Screw with 3 cables of 2 or 5 m
(black or alu)



Ceiling Suspended Split

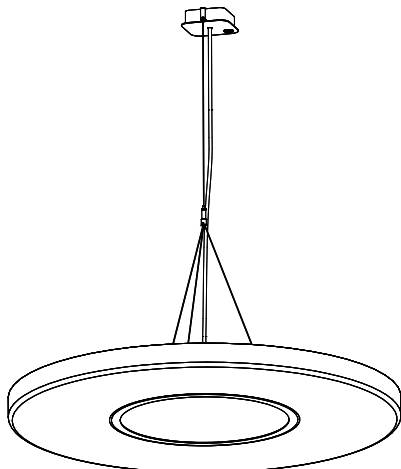

Ceiling Suspended Split
Fixing System Screw with 3 split cables and 1 main
cable, total length of 2 m or 5 m (black or alu)
Min. distance of shade to ceiling is 50 cm



Oval

Ceiling Suspended Straight

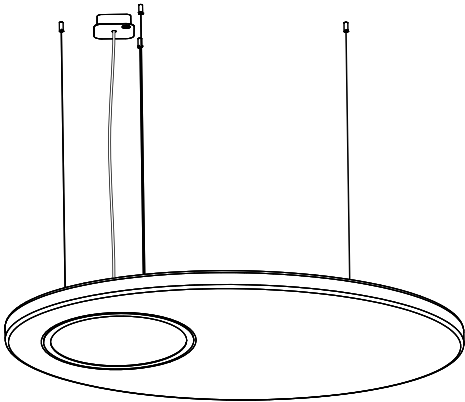


Ceiling Suspended Straight
Fixing System Screw with 4 cables of 2 or 5 m
(black or alu)

Ceiling Suspended Split

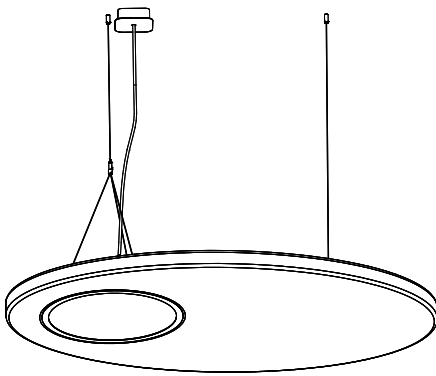

Ceiling Suspended Split
Fixing System Screw with 3 split cables and 1 main
cable, total length of 2 m or 5 m (black or alu)
Min. distance of shade to ceiling is 50 cm



▲ If installing on suspended ceiling, verify load capacity prior to installation.

Acoustic Panel



The acoustic panel is upholstered top to bottom in a chosen fabric



Absorption



Diffusion



Mid tone



High tone




Patterns Round

Flat

L

M

S


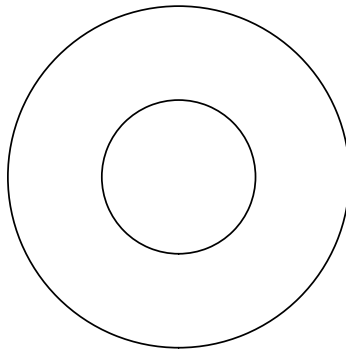
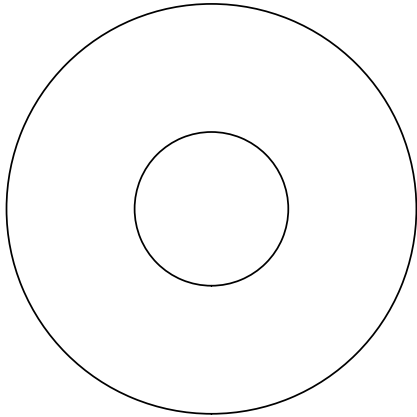


3D Rib

L

M

S


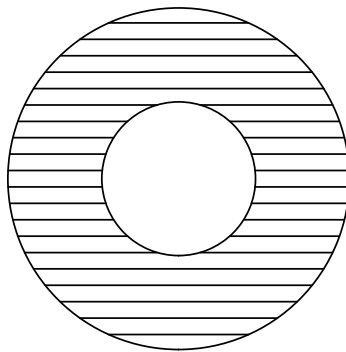
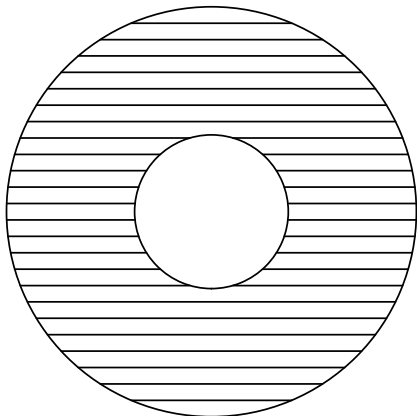


3D Leaf

L

M

S



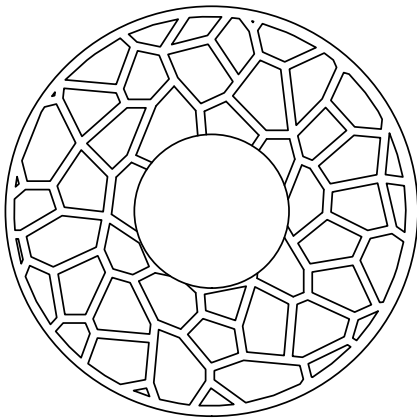


3D Drop

L

M


S

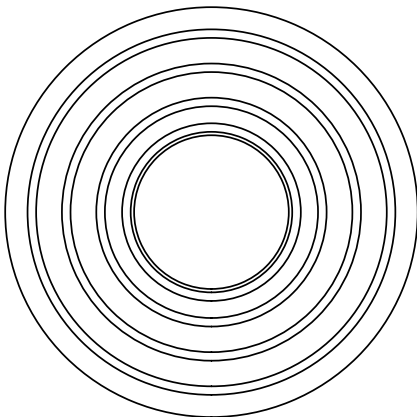


Patterns Oval

Flat

M

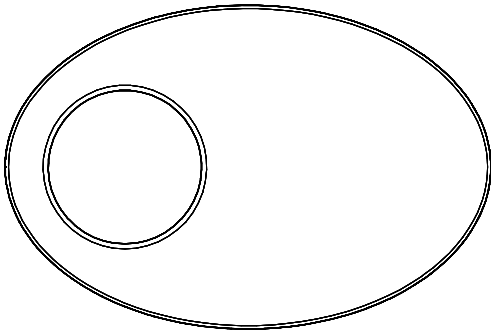


S

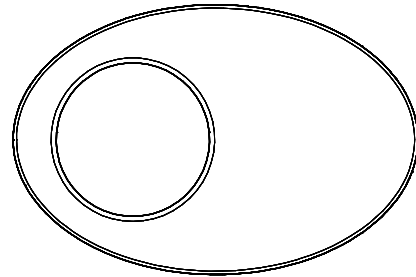


3D Leaf

M

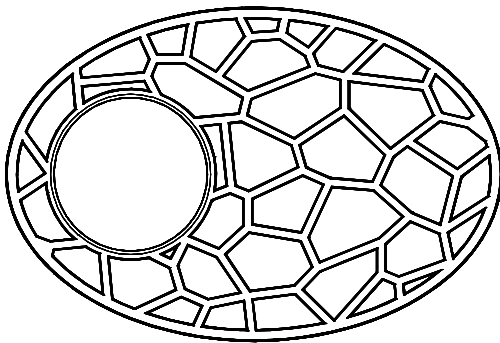


S

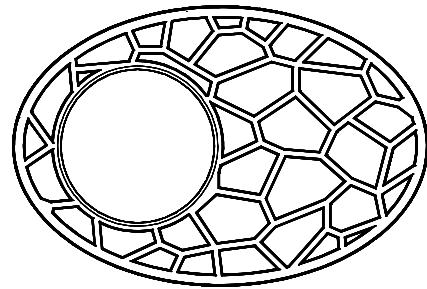


3D Rib

M

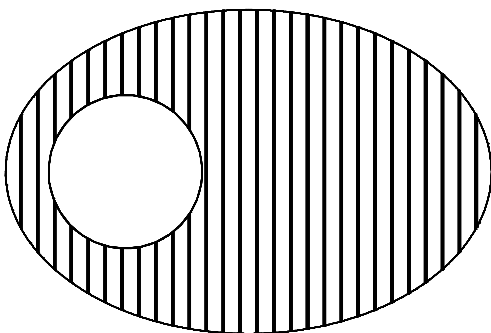


S

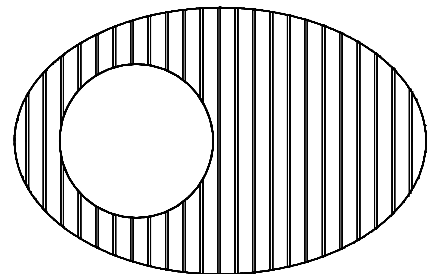

Acoustics

BuzziMoon Round


Equivalent sound absorption area in m² per object

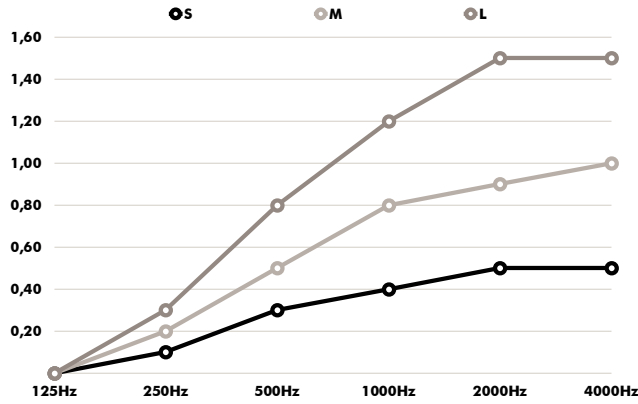

| Hz | S Aeq/m ² | M Aeq/m ² | L Aeq/m ² |
|------|----------------------|----------------------|----------------------|
| 125 | 0.0 | 0.0 | 0.0 |
| 250 | 0.1 | 0.2 | 0.3 |
| 500 | 0.3 | 0.5 | 0.8 |
| 1000 | 0.4 | 0.8 | 1.2 |
| 2000 | 0.5 | 0.9 | 1.5 |
| 4000 | 0.5 | 1 | 1.5 |

BuzziMoon Oval

Equivalent sound absorption area in m² per object

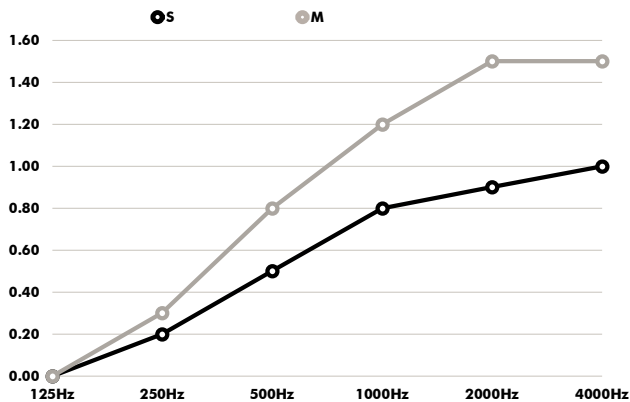

| Hz | S Aeq/m ² | M Aeq/m ² |
|------|----------------------|----------------------|
| 125 | 0.0 | 0.0 |
| 250 | 0.2 | 0.3 |
| 500 | 0.5 | 0.8 |
| 1000 | 0.8 | 1.2 |
| 2000 | 0.9 | 1.5 |
| 4000 | 1 | 1.5 |







Dimensions

Acoustic Panel Round


L

M

S

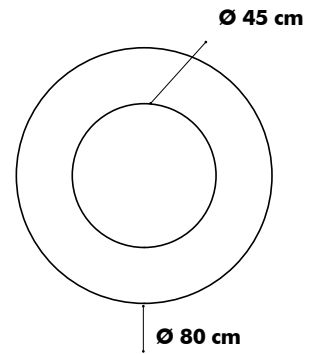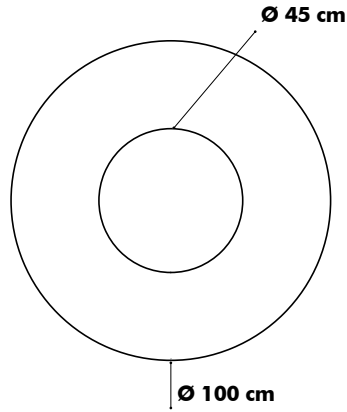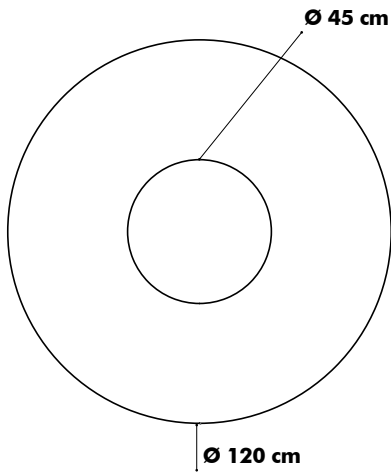


Ceiling Mounted Round

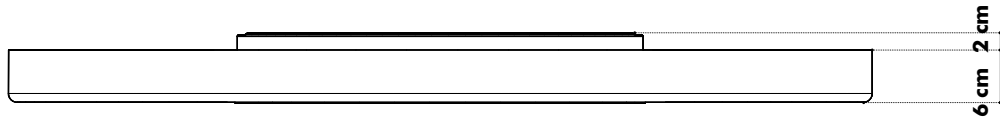


Ceiling Suspended Round

Split

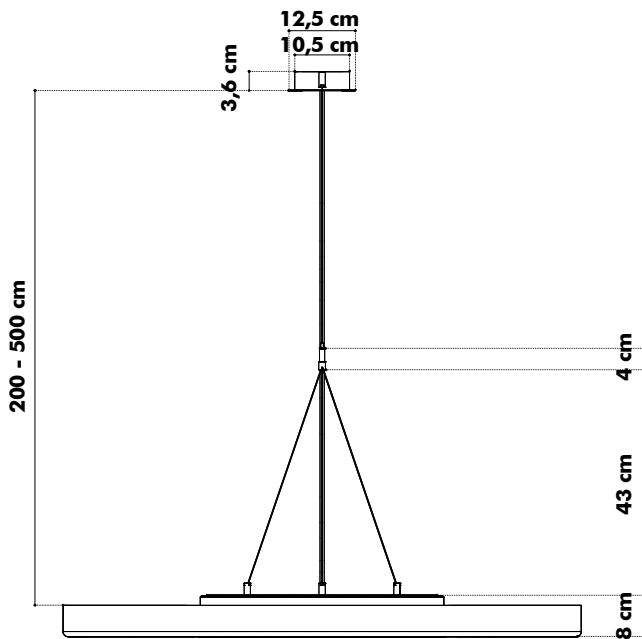


Ceiling Suspended Round

Straight

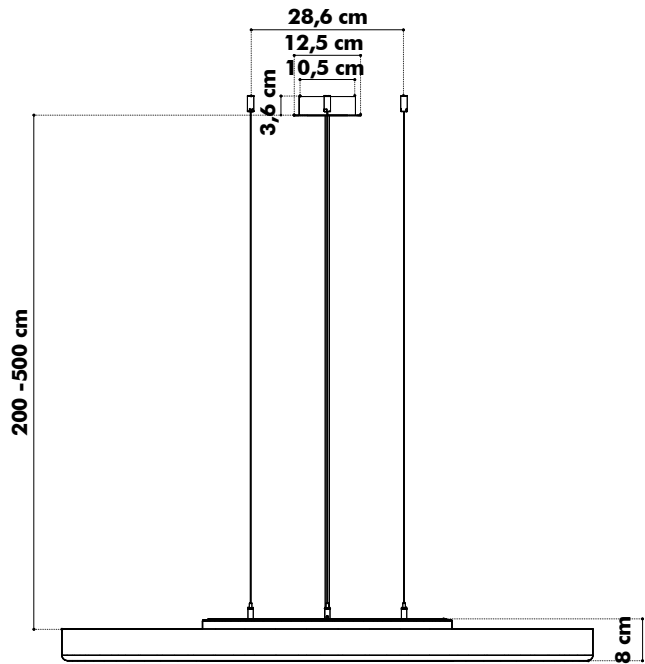


Acoustic Panel Oval


M

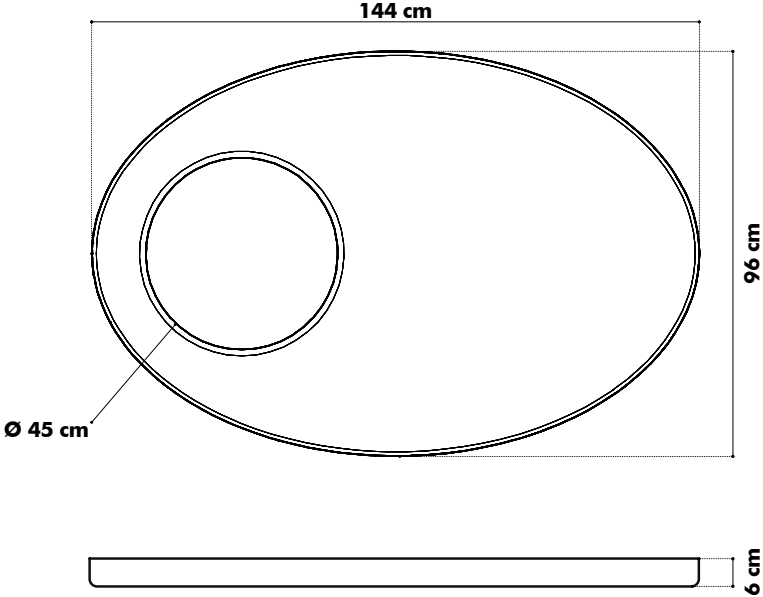


S

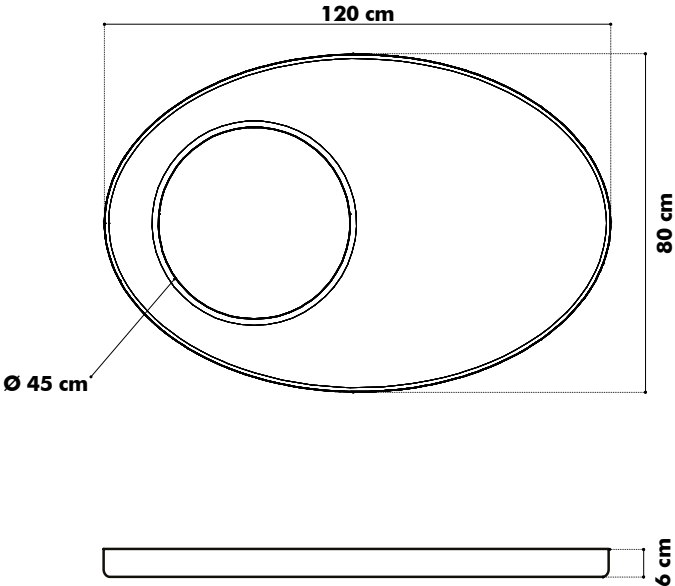

Ceiling Suspended Split Oval

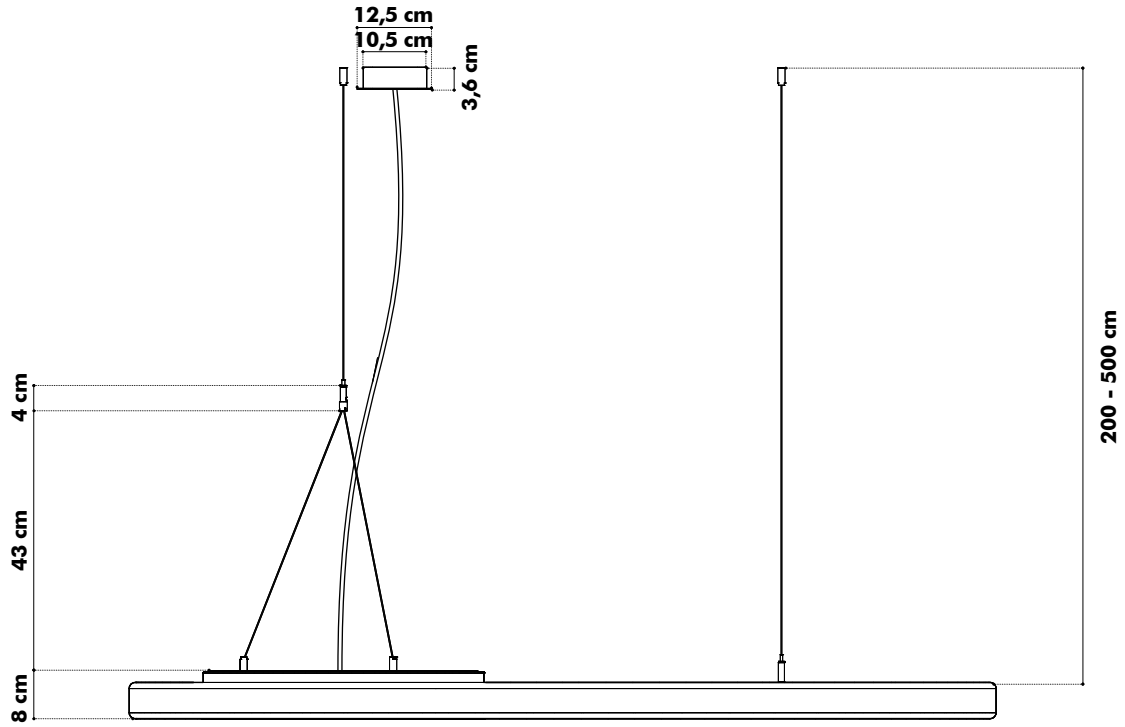



Ceiling Suspended Straight Oval

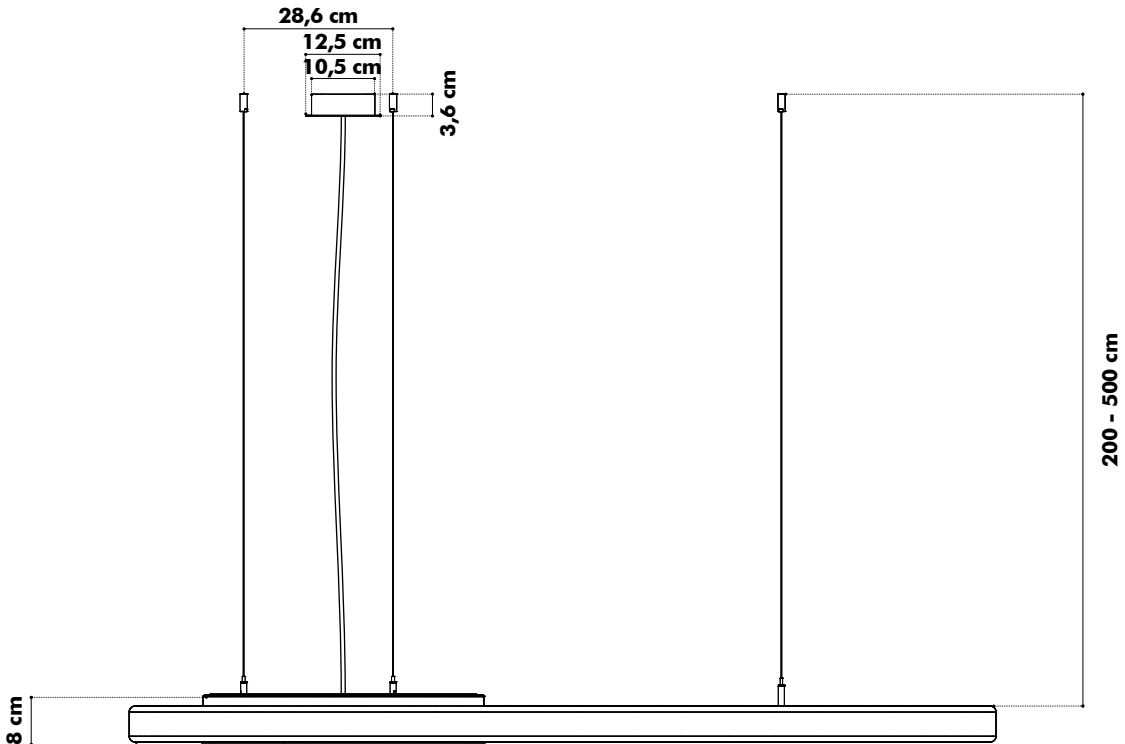


Weights


BuzziMoon Small Ceiling Mounted Round

 8,5 kg




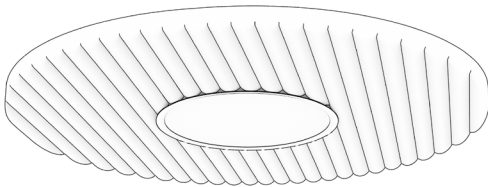
BuzziMoon Medium Ceiling Mounted Round

 10,5 kg

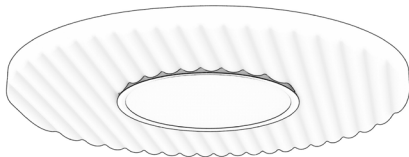



BuzziMoon Large Ceiling Mounted Round

 12,5 kg




BuzziMoon Small Ceiling Suspended Round

 9,5 kg





BuzziMoon Medium Ceiling Suspended Round

 11,5 kg





BuzziMoon Large Ceiling Suspended Round

 13,5 kg

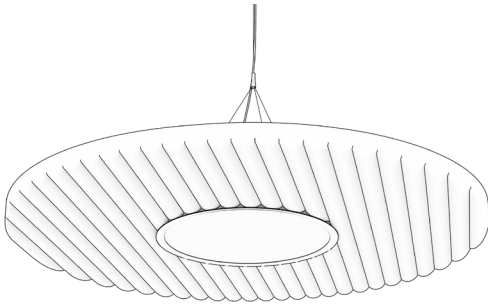


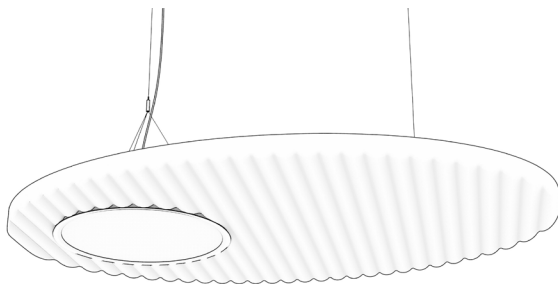
BuzziMoon Small Ceiling Suspended Oval

 10 kg

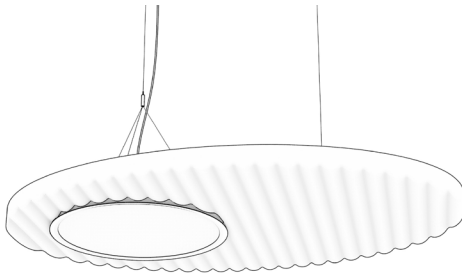


BuzziMoon Medium Ceiling Suspended Oval

 12 kg



Fabrics

Fabric (45 colors)



Category A

Composition 70% Recycled Wool, 25% Recycled Polyacryl,
5% Recycled Other Fabrics

Weight 405 g/m² | 11.94 oz/yd²

Abrasion resistance 40.000 Martindale, 50,000 Wyzenbeek

Flammability EU: EN 1021.1/2006 | BS EN 1021.1/2006 (cigarette).
EN 1021.2/2006 | BS EN 1021.2/2006 (match)
USA: CAL TB 117 | ASTM E84 CLASS A


Fastness to light EU: 4 | USA 4

Fastness to rubbing EU: Wet 3-4 | Dry 4-5

Fastness to crocking USA: Wet 5 | Dry 5



Trevira CS+ | CS (47 colors)



Category A

Weight 420 g/m² | 12.39 oz/yd²

Composition 100% Polyester, Trevira CS

Abrasion resistance 100.000 Martindale, 90,000 Wyzenbeek

Flammability BS 5852 part II: CRIB 5 | BS 7176 Medium Hazard
USA: CAL TB 117 | M1 | B1 | EN 1021/1-2 | C1 |
IMO Res. A652 (16)


Fastness to light EU: 6 | USA 5

Fastness to rubbing EU: Wet 4-5 | Dry 4-5

Fastness to crocking USA: Wet 5 | Dry 5



Revive 1 (25 colors)



Category A

Composition 100% recycled polyester FR

Weight 430 g/lin.m

Abrasion resistance 60.000 Martindale rubs, EN ISO 12947

Flammability EN 1021-1/2 | DIN 4102 B1 | Önorm B1/Q1
UNI 9175 11M | US Cal. Tech. Bull. 117
IMO A.652 (16)

Fastness to light Note 5-7, ISO 105-B02

Fastness to rubbing (ISO) dry 5, wet 4-5


Pilling Note 4-5, EN ISO 12945



kvadrat

Clara 2 (24 colors)

kvadrat



Category B

Composition 92% new wool, 8% nylon

Weight 400 g/lin.m

Abrasion resistance 80.000 Martindale rubs, EN ISO 12947

Flammability EN 1021-1/2 | BS 5852, ignition source 2-3 | DIN 4102 B2
NF D 60 013 | UNI 9175 11M | US Cal. Tech. Bull. 117, Sec. E
NFPA 260 | IMO A.652(16)

Fastness to light Note 5-7, ISO 105-B02

Fastness to rubbing (ISO) dry 4-5, wet 4

Pilling Note 4, EN ISO 12945



Remix 3 (73 colors)

kvadrat



Category B

Composition 90% new wool, 10% nylon

Weight 415 g/lin.m

Abrasion resistance 100.000 Martindale rubs, EN ISO 12947

Flammability EN 1021-1/2 | BS 5852 part 1
Önorm B1/Q1 | NF D 60 013 | UNI 9175, 11M
AS/NZS 1530.3 | Cal. Tech. Bull. 117-2013
NFPA 260 | IMO FTP Code 2010:Part 8

Fastness to light Note 5-7, ISO 105-B02


Fastness to rubbing (ISO) dry 4-5, wet 4

Pilling Note 4, EN ISO 12945



Hero 2 (33 colors)

kvadrat



Category C

Composition 97% new wool, 3% nylon

Weight 580 g/lin.m

Abrasion resistance 45.000 Martindale rubs, EN ISO 12947

Flammability EN 1021-1/2 | DIN 4102 B2 | NF D 60 013
UNI 9175 11M | US Cal. Bull. 117-2013 | NFPA 260
IMO A.652 (16)

Fastness to light Note 5-6, ISO 105-B02

Fastness to rubbing (ISO) dry 4-5, wet 4-5

Pilling Note 3-4, EN ISO 12945



Tonus 4 (47 colors)

kvadrat



Category D

Composition 90% new wool, 10% Helanca

Weight 665 g/lin.m

Abrasion resistance 100.000 Martindale rubs, EN ISO 12947


Flammability EN 1021-1/2 | BS 5852 part 1 | DIN 4102 B2
Önorm B1/Q1 | NF D 60 013 | UNI 9175 11M
US Cal. Bull. 117-2013 | NFPA 260 | IMO A.652 (16)

Fastness to light Note 5-7, ISO 105-B02

Fastness to rubbing (ISO) dry 3-5, wet 3-5

Pilling Note 3, EN ISO 12945





Category E

Composition 100% Trevira CS

Weight 700 g/lin.m

Abrasion resistance

35.000 rubs acc. to the Martindale method, EN ISO 12947

Flammability EN 1021-1/2 | DIN 4102 B1 | Önorm B1/Q1
NF D 60 013 | NF P 92 507 M1 | UNI 9175 11M
UNI 9177 classe 1 | US Cal. Tech. Bull. 117
IMO A.652 (16)

Fastness to light Note 5-8, ISO 105-B02

Fastness to rubbing (ISO) dry 4-5, wet 4-5

Pilling Note 4, EN ISO 12945

